
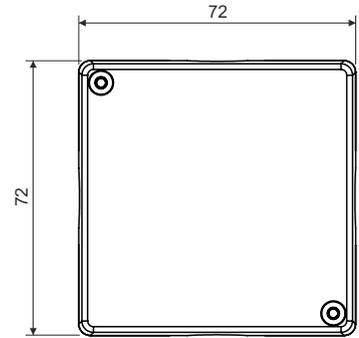


8106

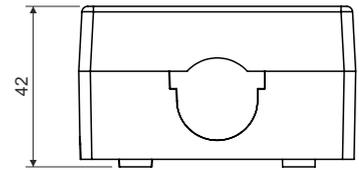

400

16

E F

: RAL 7035/ - RAL 7012
 : , 30 .
 : -5 - +60 °C
 : 650 °C
 : A1-D
 IP : IP 40
 : 96
 : EN 60 670-1

: LA - ,
 - RAL 7012
 KA - ,
 - RAL 7035

: S-66
 TYP015, TYP016, TYP017, TYP018
 G-49