
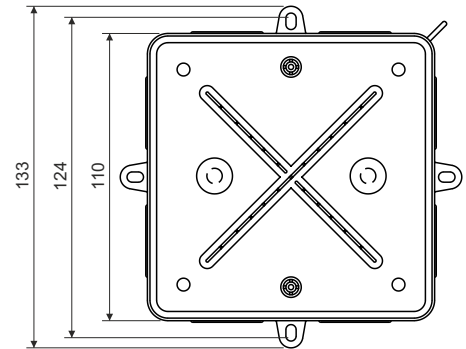


8135

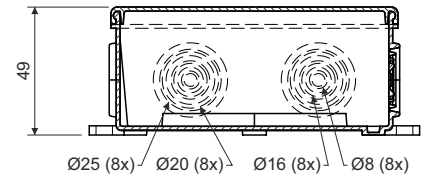

400

16

16, 20 25

EN 60423

A1-D

RAL 7035/ RAL 9003

30

-5 - +60 °C

650 °C

A1-D

IP : IP 54

: 99

: EN 60 670-1

- RAL 9003

LA -

- RAL 7035

S-96; SP-96

TYP210, TYP310, TYP412, TYP512, TYP612

TYP015, TYP016, TYP017, TYP018