
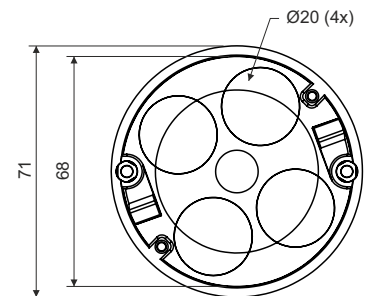


## KP 64/LD HF



product description: designed for distribution system with voltage 400 V and with maximum current 16 A  
 for premises with increased need for protection of persons and property  
 inlet openings made of flexible material  
 air-tightness even with inserted cable or pipe  
 suitable for low energy and passive houses  
 prevents airflow through the installation  
 mounting screws are fitted with a triple thread for quick installation  
 when mounting, it is not necessary to countersink the plasterboard edge  
 possibility to insert screwless terminals  
 when using box with the cover V 68HF, the IP protection is IP30

material: PP (halogen-free, Pb Free)

color: white

self-snuffing: yes, within 30 s

temperature resistance: -5 - +60 °C

flaming loop test: 850 °C

fire class for underlying material: A1-F

weight: 24 g

certification: EN 60 670-1

storage: ČSN 64 0090

configuration: HA - boxes fitted with screws for mounting into double wall and device screws - package: 100 pcs boxes loose in cardboard

accessories: cover V 68HF  
 screwless terminal plates TYP015, TYP016, TYP017, TYP018

auxiliary tools: saw-drill VPT 64  
 universal carrier VPTU  
 spring P1