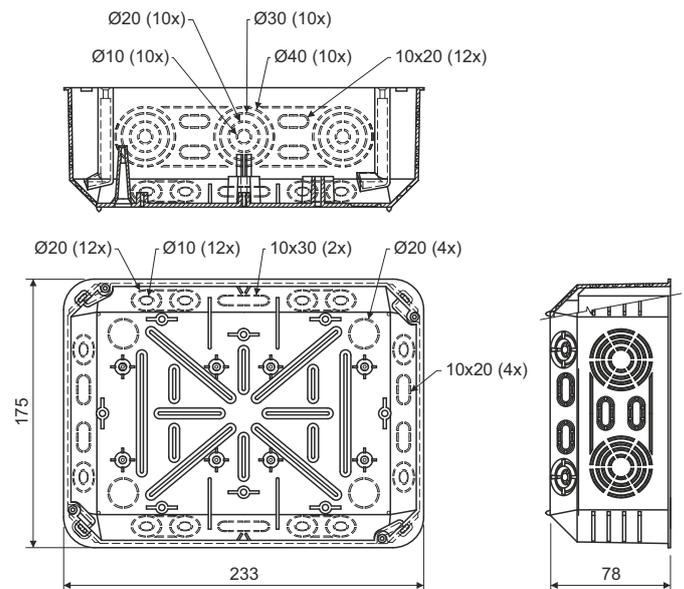


**box with cover VKT 250/L**
**KT 250/L**

**product description:**

designed for distribution system with voltage 400 V and with maximum current 16 A  
 a large number of knockouts for introducing cables and pipes  
 possibility to install the support trunking TS 35  
 possibility to set the lid in a horizontal position  
 possibility to break the sidewall for easier cable handling  
 outer side of the bottom contains holes for marking drill holes  
 mounting screws are fitted with a triple thread for quick installation

material: PVC (Pb Free)

color: yellow

self-snuffing: yes, within 30 s

temperature resistance: -5 - +60 °C

flaming loop test: 850 °C

fire class for underlying material: A1-F

weight: 535 g

certification: EN 60 670-1

storage: ČSN 64 0090

**configuration:**

NB - lid screws and screws for mounting into double wall inserted into box, each box with a lid sealed in shrink foil and labelled; 12 pcs boxes stacked in cardboard

ST - screws for mounting into double wall installed in the box, lid screwed to the box and box labelled; 12 pcs boxes stacked in cardboard

**accessories:**

terminal plate S-96; S-96; SP-96

equipotential terminal plate EPS 2

screwless terminal plates TYP015, TYP016, TYP017, TYP018

support trunking TS35

**auxiliary tools:**

saw-drill VPT 40

universal carrier VPTU

spring P1