


## KU 68-1902

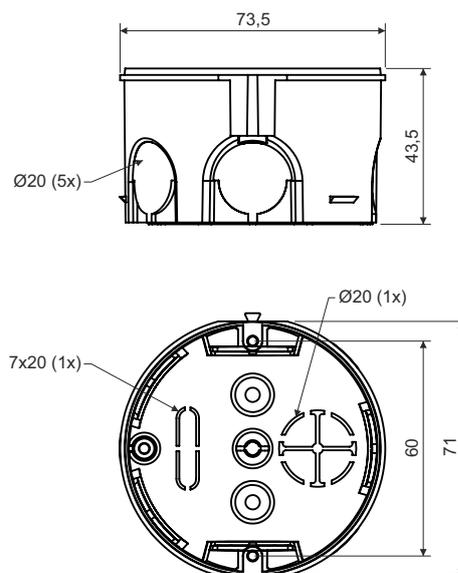

product  
description:

designed for distribution system with voltage 400 V and with maximum current 16 A  
to create path branches  
easy-to-install cover, even without tools

material: PVC

color: gray

self-snuffing: yes, within 30 s

temperature resistance: -5 - +60 °C

flaming loop test: 850 °C

fire class for underlying material: A1-D

weight: 44 g

certification: EN 60 670-1

storage: ČSN 64 0090

configuration: KA - boxes fitted with a cover - package: 100 pcs boxes loose in cardboard

accessories:

blind cover ZV 68  
extending frames NR 68/6, NR 68/10  
extending piece TN 68  
terminal plate S-66  
screwless terminal plates TYP015, TYP016, TYP017, TYP018

auxiliary tools: non-hammered masonry cutter FR 68 SDS