


universal box into thermal insulation with open cover

KUZ-VO

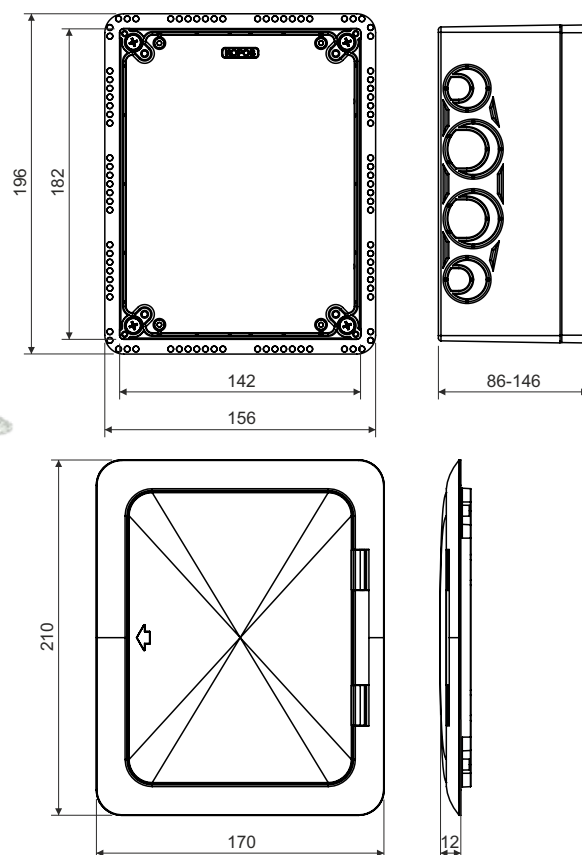

product description:

Box designated for distribution systems with voltage up to 400 V
 For installation in insulated building facades 80-140 mm thick, or as a box under plaster
 Use for the installation of electrical equipment, a distribution box and other applications as required by the customer
 Box depth is adjustable
 The kit contains the box and VO 180 open cover, mounting plate and stainless bolts
 When installing on exterior plaster, it is recommended to seal the lid with silicone, or rubber-based window seal (IP 44)
 Robust design
 Protected by European industrial design
 Installation video at www.kopos.cz

material: PC ABS, halogen-free

color: gray

self-snuffing: yes, within 30 s

temperature resistance: -25 - +60 °C

flaming loop test: 850 °C

fire class for underlying material: A1-F

protection types: IP 30

protection types: IP 44 - seal under the lid, plaster roughness up to 2 mm

weight: 555 g

certification: EN 60 670-1

storage: ČSN 64 0090



configuration: KB - individual boxes packed in separate cardboard

accessories: screwless terminal plates TYP015, TYP016, TYP017, TYP018
 instrument carrier PK KUZ
 support trunking TS35