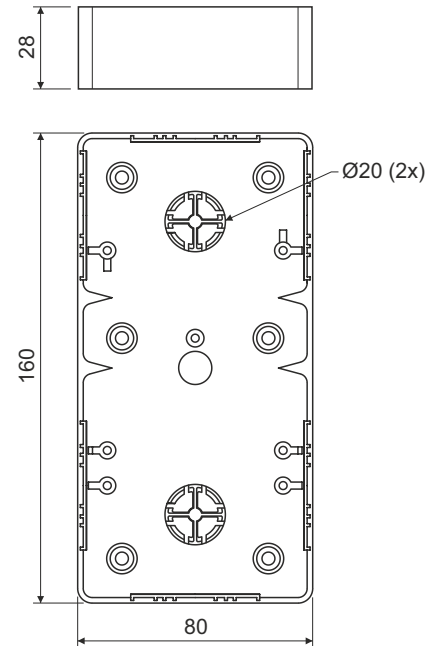


junction box**LK 80X28 2R****product description:**

designed for distribution system with voltage 400 V and with maximum current 16 A
 intended for devices of Classic and Swing - ABB series
 allows installation of devices with greater mounting depth
 installation of two devices or and double-socket
 on the sides of the box are marked inlets for the trunkings
 to install on materials with fire classes E or F, use insulating pad

material: **PVC**color: **white**self-snuffing: **yes, within 30 s**temperature resistance: **-5 - +60 °C**flaming loop test: **850 °C**fire class for underlying material: **A1-D**weight: **91 g**certification: **EN 60 670-1**storage: **ČSN 64 0090****configuration:**

HB - 10 pcs boxes including device screws (for 2 devices in 1 box) packed in foil; 60 pcs boxes in cardboard

accessories:cover **VLK 80/R; VLK 80/2R**thermo-insulating pad **PI 80 2ZK**terminal plate **S-66**screwless terminal plates **TYP015, TYP016, TYP017, TYP018**