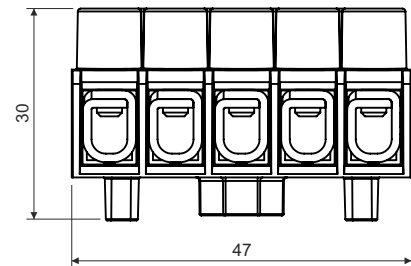
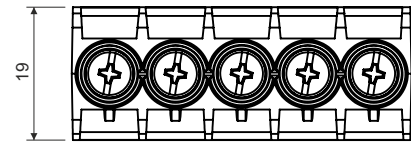
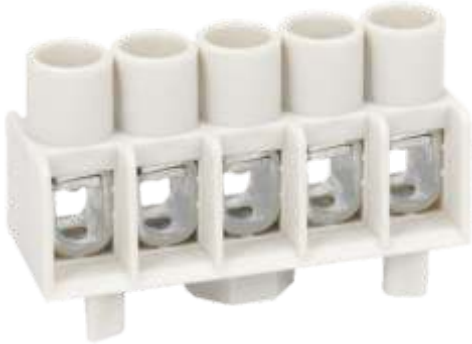


terminal plate

S-KSK 1product
description:

suitable for boxes KSK 80 and KSK 100
 enables easy assembly to the box bottom
 designed for and maximum voltage of 500 V
 branch terminal plate of five separate terminals
 one terminal is intended: for 4 conductors of 1.5 to 2.5 mm² or for 3 conductors 4 mm²

material: PP (halogen-free, Pb-free material)

color: light gray RAL 7035

self-snuffing: yes, within 30 s

temperature resistance: -40 - +85 °C

flaming loop test: 850 °C

fire class for underlying material: A1-F

weight: 19 g

certification: EN 60998-1

storage: ČSN 64 0090

configuration: KB - 10 pc terminals packed in foil, labeled; 460 pc terminals stacked in a box