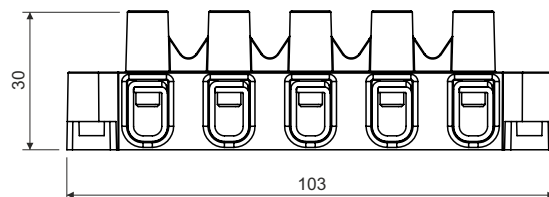
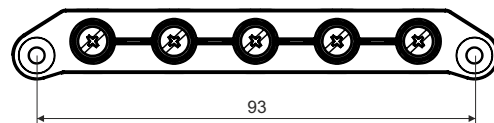


terminal plate

S-KSK 2

product description:

suitable for boxes KSK 125 and KSK 175

allows mounting to posts inside boxes or to the box bottom – installation is done using screws that are included designed for and maximum voltage of 500 V

branch terminal plate of five separate terminals

one terminal is intended: for 4 conductors of 2.5 to 4 mm² or for 3 conductors 6 mm²

material: PP (halogen-free, Pb-free material)

color: light gray RAL 7035

self-snuffing: yes, within 30 s

temperature resistance: -40 - +85 °C

flaming loop test: 850 °C

fire class for underlying material: A1-F

weight: 36 g

certification: EN 60998-1

storage: ČSN 64 0090

configuration: KB - 10 pc terminals packed in foil, labeled; 200 pc terminals stacked in a box