


TYP015
TYP016
TYP017
TYP018

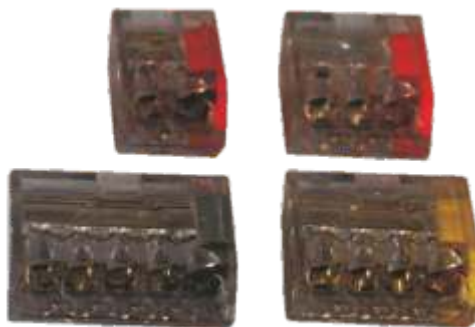

product
description:

quick and safe installation without screws, installation only by pushing
 terminals are intended for full Cu conductors
 for wires with cross-section from 1,0-2,5 mm²
 maximum working load of 24 A
 for voltages of up to 450 V
 transparent color for the visible control
 color-coding stripe

item number	number of conductors	dimension (mm)	color
TYP017	2	10,5 x 9,5 x 9,5	transparent + distinctive red stripe
TYP016	3	13,5 x 9,5 x 9,5	transparent + distinctive orange stripe
TYP018	4	17,2 x 9,5 x 9,5	transparent + distinctive yellow stripe
TYP015	5	21,5 x 9,5 x 9,5	transparent + distinctive gray stripe

material: PA

color: transparent + distinctive stripe

self-snuffing: yes, within 30 s

temperature resistance: -40 - +110 °C

flaming loop test: 850 °C

certification: EN 60998-1; EN 60998-2-2

storage: ČSN 64 0090