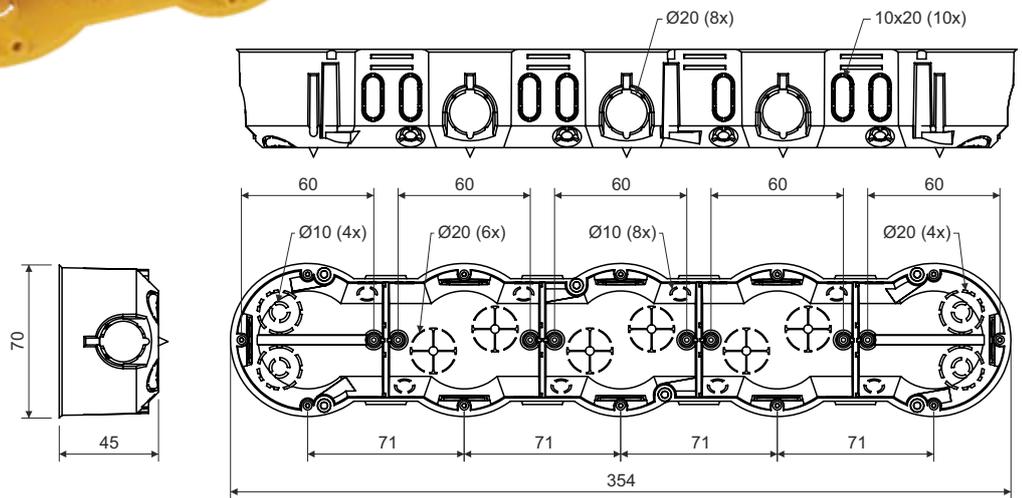
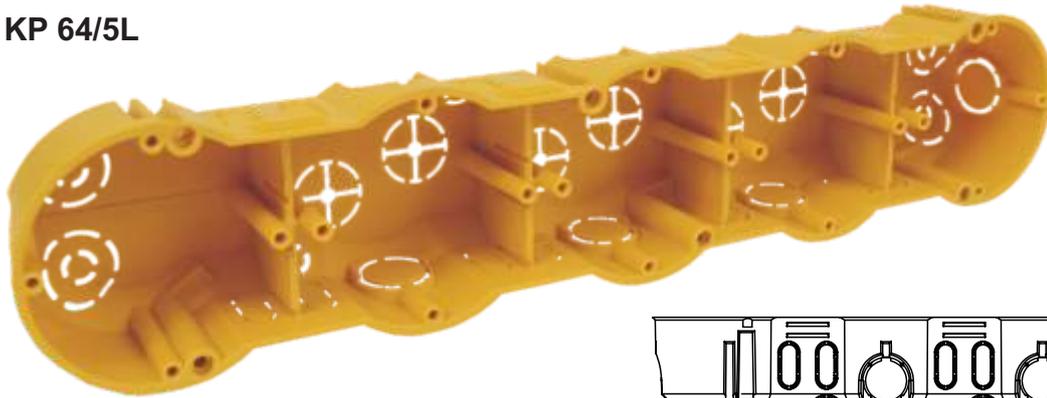


**KP 64/5L**


400

16

( 71 )

: ( )

 : 30  
 : -5 - +60 °C  
 : 850 °C

: A1-F

: 180

: EN 60 670-1

TYP015, TYP016, TYP017, TYP018

VPT 64

VPTU

P1