


KT 250/1

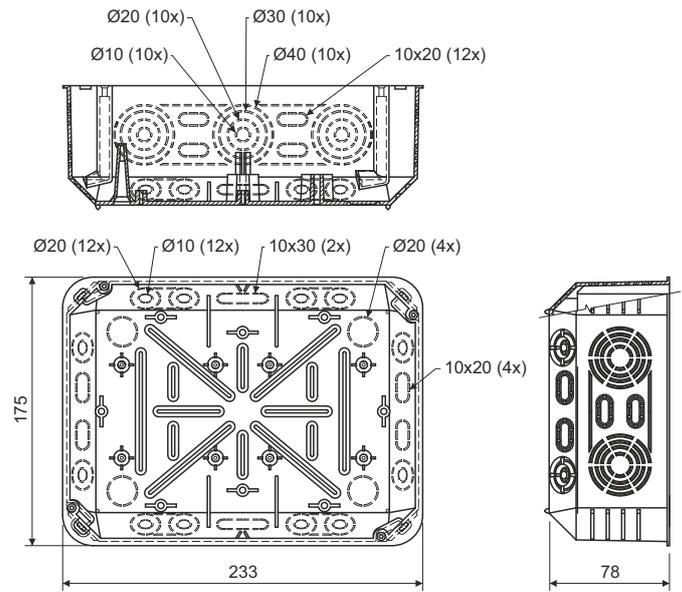

400

16

35

30
 : -5 - +60 °C
 : 850 °C
 EN 13 501-1: A1-D

: 520

: EN 60 670-1

S-66; S-96; SP-96

EPS 2

TYP015, TYP016, TYP017, TYP018

TS35