


KU 68-1902

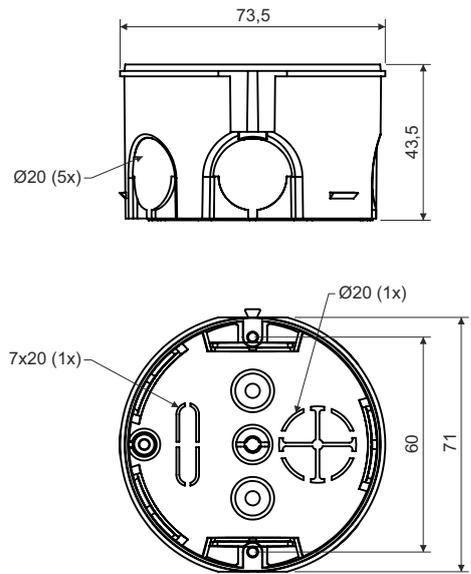

400

16

:
 :
 : 30
 : -5 - +60 °C
 : 850 °C
 : A1-D
 : 44
 : EN 60 670-1

accessories: ZV 68
 NR 68/6, NR 68/10
 TN 68
 S-66
 TYP015, TYP016, TYP017, TYP018

FR 68 SDS