


product description: Trunkings are supplied with cover.  
 Optimal closing, fixed cover. Easy installation and removal.  
 Rib can be easily broken out at the bottom of the trunking.



material: PVC - Pb-free, hard to inflame  
 self-snuffing: yes, within 30 s  
 temperature resistance - static: -20 - +60 °C  
 temperature resistance - dynamic: -5 - +60 °C  
 working temperature: >0 °C  
 dielectric strength: >30 kV/mm  
 fire class for underlying material: A1-F  
 colour: RAL 7030 gray  
 certification: EN 50085-1 ed.2:06, EN 50085-2-1:07  
 storage: ČSN 64 0090



Perforation in three rows above the width of 75 mm.

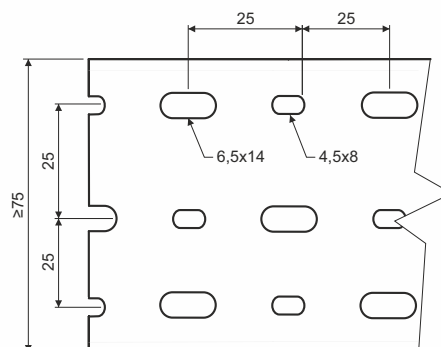

Perforation in one row up to the width of 50 mm.

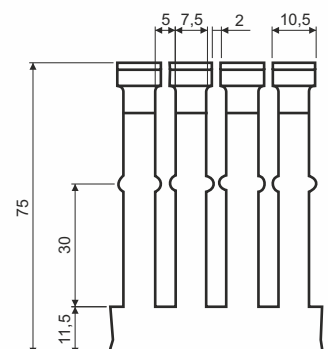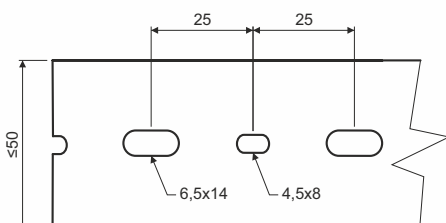

type number	outer width x height (mm)	inner width x height (mm)	length (m)	package (m)	number of conductors when 50% of the trunking capacity is filled		
					0,75 mm <sup>2</sup> Ø2,8 mm	1 mm <sup>2</sup> Ø2,9 mm	1,5 mm <sup>2</sup> Ø3,2 mm
<b>RK 25X25 DIN_LD</b>	25 x 25	20 x 20	2	48	32	30	25
<b>RK 50X50 DIN_LD</b>	50 x 50	45 x 45	2	42	165	153	126
<b>RK 37.5X75 DIN_LD</b>	37,5 x 75	33 x 70	2	24	188	175	144
<b>RK 50X75 DIN_LD</b>	50 x 75	45 x 70	2	28	256	239	196
<b>RK 75X75 DIN_LD</b>	75 x 75	70 x 70	2	24	398	371	305