


PCE

Connection
to the future






Safety

POWER
TWIST



Lamellar spring

- low insertion and extraction forces
- minimum contact resistance
- self-cleaning
- optimum contact - at least 10 contact points


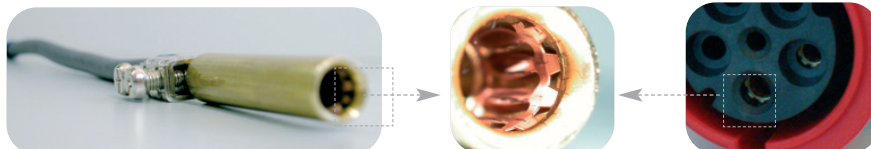


TWIST-cable gland

- secures the cable firmly in position
- protects from water and dust

Safety screw

- locks the screw cap in position




Heavy Duty

POWER
TWIST



- **For extreme environments**
- **Exceptional high impact resistance**
- **Extreme heat resistant contact carriers**
- **Anti-corrosion contacts**
 - offer protection in aggressive atmospheres, e.g. in chemical plants, food industries



Time Saving

POWER
TWIST



-  **TWIST-cable gland**
 - quick and easy assembly
-  **Optimum grip**
 - slim easy-grip shape - for ease of handling
-  **Ample connection space**
 - fast cable installation
-  **Open contact terminals, ready for assembly**

Order numbers

"Power Twist" plug

- with Twist-cable gland
- nickel-plated contacts with pilot contact



IP66/67

for waterproof cover see Accessories

Amps

Poles

110V~
50/60Hz
4h

230V~
50/60Hz
3p=6h
4p+5p=9h


400V~
50/60Hz
3p=9h
4p+5p=6h

500V~
50/60Hz
7h

>50-
500V~
100-300Hz
10h

"Power Twist" wall mounted plug

- cable entry from top, bottom or rear
- nickel-plated contacts with pilot contact




IP66/67

for waterproof cover and cable-gland see Accessories

"Power Twist" flanged plug, straight

- nickel-plated contacts with pilot contact




IP66/67

for waterproof cover see Accessories

"Power Twist" flanged plug, sloping/angle

- nickel-plated contacts with pilot contact



IP66/67

for waterproof cover see Accessories

"Power Twist" connector

- with Twist-cable gland
- with lamellar contact
- for version with pilot contact insert a "5" in the order number, e.g. 2335-6




IP66/67


Order numbers

"Power Twist" wall socket

- cable entry from top, bottom or rear
- with lamellar contact
- for version with pilot contact insert a "5" in the order number, e.g. 1335-6



HxWxL = 170x118x172



HxWxL = 260x160x190

IP66/67

Amps

Poles

Order No.	Order No.	Order No.	Order No.	Order No.
110V~ 50/60Hz 4h	230V~ 50/60Hz 3p=6h 4p+5p=9h	400V~ 50/60Hz 3p=9h 4p+5p=6h	500V~ 50/60Hz 7h	>50-500V~ 100-300Hz 10h

Basic unit HxWxL = 170x118x172: 1xM40, 2xM32

133-4	133-6	133-9	133-7	133-10
134-4	134-9	134-6	134-7	134-10
135-4	135-9	135-6	135-7	135-10

Basic unit HxWxL = 260x160x190: 1xM40, 2xø40

1337-4	1337-6	1337-9	1337-7	1337-10
1347-4	1347-9	1347-6	1347-7	1347-10
1357-4	1357-9	1357-6	1357-7	1357-10

Basic unit HxWxL = 260x160x201: 1xø50, 2xø40


143-4	143-6	143-9	143-7	143-10
-------	--------------	-------	-------	--------

Basic unit HxWxL = 260x160x201: 1xM63, 2xø40

144-4	144-9	144-6	144-7	144-10
145-4	145-9	145-6	145-7	145-10

"Power Twist" flanged socket, straight

- with lamellar contact
- for version with pilot contact insert a "5" in the order number, e.g. 3335-6



IP66/67

Flange: 100x100, fixing center: 80x80

333-4	333-6	333-9	333-7	333-10
334-4	334-9	334-6	334-7	334-10
335-4	335-9	335-6	335-7	335-10

Flange: 107x100, fixing center: 85x77


333-4fc	333-6fc	333-9fc	333-7fc	333-10fc
334-4fc	334-9fc	334-6fc	334-7fc	334-10fc
335-4fc	335-9fc	335-6fc	335-7fc	335-10fc

Flange: 120x120, fixing center: 100x100

343-4	343-6	343-9	343-7	343-10
344-4	344-9	344-6	344-7	344-10
345-4	345-9	345-6	345-7	345-10

"Power Twist" flanged socket, sloping/angle

- with lamellar contact
- for version with pilot contact insert a "5" in the order number, e.g. 4335-6



IP66/67

Flange: 112x100, fixing center: 88x80

433-4	433-6	433-9	433-7	433-10
434-4	434-9	434-6	434-7	434-10
435-4	435-9	435-6	435-7	435-10

Order numbers

“Power Twist” flanged socket, sloping/angle

- with lamellar contact
- for version with pilot contact insert a “5” in the order number, e.g. 433**5**-6



IP66/67

Amps


Poles

Order No.	Order No.	Order No.	Order No.	Order No.
110V~ 50/60Hz 4h	230V~ 50/60Hz 3p=6h 4p+5p=9h	400V~ 50/60Hz 3p=9h 4p+5p=6h	500V~ 50/60Hz 7h	>50-500V~ 100-300Hz 10h

		Flange: 107x100, fixing center: 85x77				
63	3	433-4fc	433-6fc	433-9fc	433-7fc	433-10fc
63	4	434-4fc	434-9fc	434-6fc	434-7fc	434-10fc
63	5	435-4fc	435-9fc	435-6fc	435-7fc	435-10fc
		Flange: 110x106, fixing center: 90x90				
63	3	433-4fd	433-6fd	433-9fd	433-7fd	433-10fd
63	4	434-4fd	434-9fd	434-6fd	434-7fd	434-10fd
63	5	435-4fd	435-9fd	435-6fd	435-7fd	435-10fd
		Flange: 130x120, fixing center: 108x100				
125	3	443-4	443-6	443-9	443-7	443-10
125	4	444-4	444-9	444-6	444-7	444-10
125	5	445-4	445-9	445-6	445-7	445-10
		Flange: 114x114, fixing center: 90x90				
125	3	443-4fe	443-6fe	443-9fe	443-7fe	443-10fe
125	4	444-4fe	444-9fe	444-6fe	444-7fe	444-10fe
125	5	445-4fe	445-9fe	445-6fe	445-7fe	445-10fe

“Power Twist” Switched interlocked socket

- mechanical interlock
- cable entry from top, bottom or rear
- with lamellar contact
- for version with pilot contact insert a “5” in the order number, e.g. 7535**25**-6



IP66/67

		Basic unit HxWxL = 260x160x201: 1xM40, 2xø40				
63	3	75332-4	75332-6	75332-9	75332-7	
63	4	75342-4	75342-9	75342-6	75342-7	
63	5	75352-4	75352-9	75352-6	75352-7	

Accessories

Waterproof cover



s7632g

IP67 waterproof cover
for 63A plugs and appliance plugs

s1252g

IP67 waterproof cover
for 125A plugs and appliance plugs

23321515200	IP68 M32x1.5 screw fitting - black	(cable diameter 18-25 mm)	264015009	M40 x 1.5 lock nut	Nickel-coated brass
23401518260	IP68 M40x1.5 screw fitting - black	(cable diameter 22-32 mm)	265015009	M50 x 1.5 lock nut	Nickel-coated brass
23501518310	IP68 M50x1.5 screw fitting - black	(cable diameter 32-38 mm)			
23631518350	IP68 M63x1.5 screw fitting - black	(cable diameter 34-44 mm)			

Note: For entries without threads, marked by “ø”, the appropriate lock nuts should be used.



Группа ICS
Центр дистрибуции

Москва

+7 (495) 720-49-00, +7 (495) 720-49-08

ics@icsgroup.ru

www.icsgroup.ru

Санкт-Петербург

+7 (812) 337-10-87, +7 (812) 337-56-32

baltica@icsgroup.ru

www.icsbaltica.ru

Розничный магазин

Бакунинская, д.74, +7 (495) 720-49-05

www.icsmarket.ru