

Knürr Mobile Equipment Carriers

Universal Cart Systems

Ergonomic, Modular, Future-Proof



Knürr Mobile Equipment Carriers

Mobility In Practice	2
Knürr EliMobil®	4
Knürr DacoMobile®	11
Knürr SynergyCart	20
Knürr MetraMobil®	28
Accessories	34

Mobility In Practice

Modular & Industrial Solutions

Whether it be the workshop area, electronics lab, in health care applications or in office environment, our extensive standard range provides diverse solutions for the safe and secure mobility of valuable equipment. Our modular designs enable versatile cart configurations, immediately or at any time later on.

For demanding ESD environments Knürr provides various cart systems – ranging from robust transport trolleys through to the fully equipped measurements and diagnostics cart.

Ergonomic details also simplify daily tasks in a wide range of environments.

An extensive range of accessories supplements Knürr's mobile equipment carriers as requested by the customer: Flat screen holders, ESD castors, isolating transformers and leakage detectors, cable routing elements and all kinds of accessories for the medical sector.



MOB20030



MOB 20026



MOB20084



MET 20000



BIL00229



BIL00071



BIL00072



BIL00107

Knürr EliMobil® Strong points

Aesthetics

- Modern and slim look with dynamic shapes
- Extrusions and die-cast rockers in modern design with narrow crosspiece
- Side panels of the shelves dynamically shaped
- Cable ducts are aesthetic and space-saving integrated into the extrusion

Functionality

- High EMC safety with separate cable routing of mains and data cables
- Storage space in the crosspiece for socket strips and excess cables
- Space-saving with optional use of surface areas with 2 basic widths* (450 mm and 550 mm)
* useable internal dimension between the extrusions
- Worktop can be loaded up to 300 N
(overall load rating of the trolley: up to 1800 N)

Variability

- Numerous individual models possible
- All modules can be combined and mounted in the easiest possible way
- Individual configuration with adjustment of the installation components at 25 mm intervals
- Simple and quick adjustment without special tools

Convenience


- Easy to clean with coated surfaces
- All surfaces are corrosion-free, impact and scratch-proof and acid and disinfection agent-resistant
- Vibration-free and noiseless transport with special rubber smooth-running castors Ø 100 mm



BIL20011



BIL00151

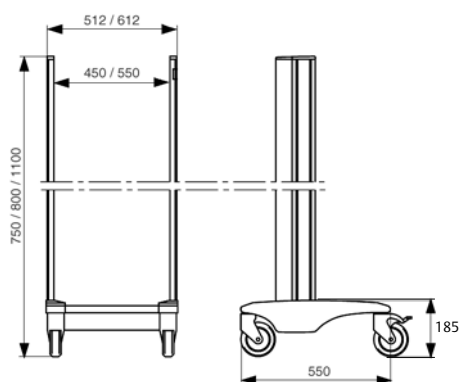

BIL00237

Knürr EliMobil® System Components

Technical data

- Modules can be installed at increments of 25 mm

Maximum static load rating

- Per basic frame: 1800 N
- Per castor: 750 N
- Surface load per worktop: 300 N

Material

Basic rack consists of:

- Extrusions: extruded aluminium
- Rockers: die-cast aluminium
- Crosspiece: sheet steel

Worktops: sheet steel/plastic
Storage shelf, storage tray: sheet steel

Drawer module consisting of:
- Main unit, panels: plastic laminate-coated

Finish

- Metal parts: powder-coated texture
- Laminated sheet: fine textured
- Plastic parts: coated texture

Color combinations

Final digit of order number.2:

- Basic frame: RAL 7035 light-grey
- Plastic handles and caps: RAL 5003 sapphire blue
- Castors: RAL 9011, graphite black

How supplied

Fully assembled



BIL20010

Knürr EliMobil® Laptop cart

Dimensions

Height, 800 mm
Useable width, 450 mm

Supply schedule

1 Basic frame
1 Worktop with handle
1 Drawer unit
Division 3 OU
1 Storage tray

Material

Extrusions: aluminium
Worktops: sheet steel/plastic
(for more technical data, see page 24)

Dimensions

Height, 800
Overall width, 512 mm
Useable width, 450 mm
Depth, 550 mm

Color combinations

RAL 7035 light-grey/
RAL 5003 sapphire blue

Castors

RAL 9011, graphite black


How supplied

Fully assembled

W	H	D	w	d	Order no.	UP
612	800	550	550	427	00.306.447.2	1 unit




BIL00216

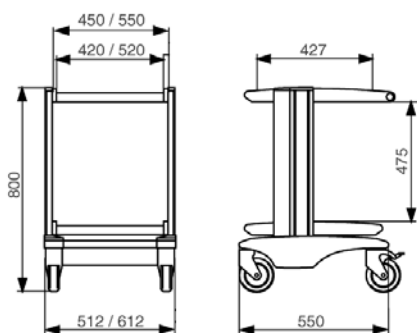

BIL00205



BIL00217

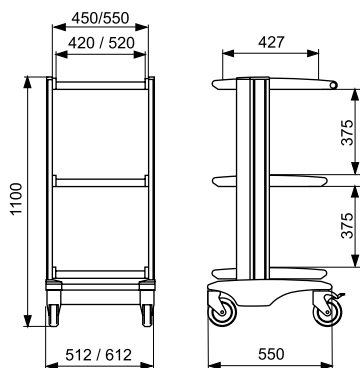

BIL00206

Knürr EliMobil® PC 3

■ Dimensions

Height, 800 mm

■ Supply schedule

1 Basic frame
1 Worktop with handle
1 Worktop

■ Material

Extrusions: aluminium
Worktops: sheet steel/plastic
(for more technical data, see page 24)

■ Dimensions

Height 800 mm
Overall width, 512 or 612 mm
Useable width, 450 or 550 mm
Depth, 550 mm

■ Color combinations

RAL 7035 light-grey/
RAL 5003 sapphire blue

■ Castors

RAL 9011, graphite black

■ How supplied

Fully assembled

W	H	D	d	w	Order no.	UP
512	800	550	427	450	00.306.424.2	1 unit
612	800	550	427	550	00.306.425.2	1 unit

Knürr EliMobil® PC 4

■ Dimensions

Height, 1,100 mm

■ Supply schedule

1 Basic frame
1 Worktop with handle
2 Worktops

■ Material

Extrusions: aluminium
Worktops: sheet steel/plastic
(for more technical data, see page 24)

■ Dimensions

Height, 1,100 mm
Overall width, 512 or 612 mm
Useable width, 450 or 550 mm
Depth, 550 mm

■ Color combinations

RAL 7035 light-grey/
RAL 5003 sapphire blue

■ Castors

RAL 9011, graphite black


■ How supplied

Fully assembled

W	H	D	d	w	Order no.	UP
512	1100	550	427	450	00.306.428.2	1 unit
612	1100	550	427	550	00.306.429.2	1 unit



BIL00224

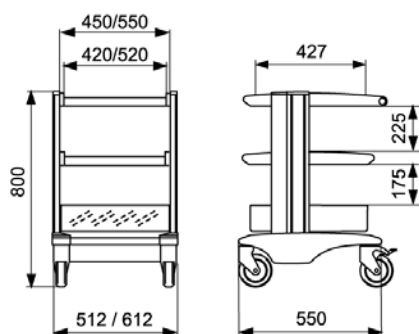

BIL00207


Knürr EliMobil® Labor 3

- **Dimensions**
Height, 800 mm
- **Supply schedule**
1 Basic frame
1 Worktop with handle
1 Worktop
1 Storage tray
- **Material**
Extrusions: aluminium
Worktops: sheet steel/plastic
(for more technical data, see page 24)
- **Dimensions**
Height, 800
Overall width, 512 or 612 mm
Useable width, 450 or 550 mm
Depth, 550 mm
- **Color combinations**
RAL 7035 light-grey/
RAL 5003 sapphire blue
- **Castors**
RAL 9011, graphite black
- **How supplied**
Fully assembled

W	H	D	d	w	Order no.	UP
512	800	550	427	450	00.306.432.2	1 unit
612	800	550	427	550	00.306.433.2	1 unit



BIL00225

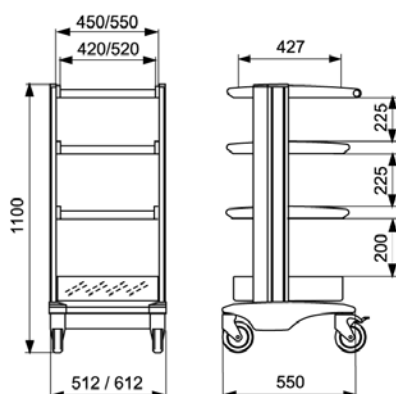

BIL00208


Knürr EliMobil® Labor 4

- **Dimensions**
Height, 1,100 mm
- **Supply schedule**
1 Basic frame
1 Worktop with handle
2 Worktops
1 Storage tray
- **Material**
Extrusions: aluminium
Worktops: sheet steel/plastic
(for more technical data, see page 24)
- **Dimensions**
Height, 1100 mm
Overall width, 512 or 612 mm
Useable width, 450 or 550 mm
Depth, 550 mm
- **Color combinations**
RAL 7035 light-grey/
RAL 5003 sapphire blue
- **Castors**
RAL 9011, graphite black
- **How supplied**
Fully assembled

W	H	D	d	w	Order no.	UP
512	1100	550	427	450	00.306.436.2	1 unit
612	1100	550	427	550	00.306.437.2	1 unit




BIL00227

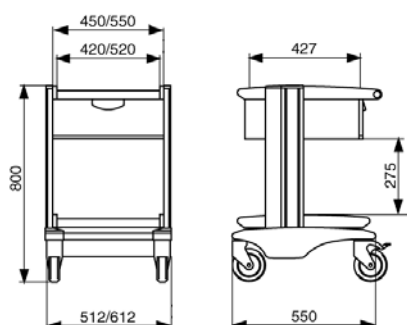

BIL00209



BIL00229

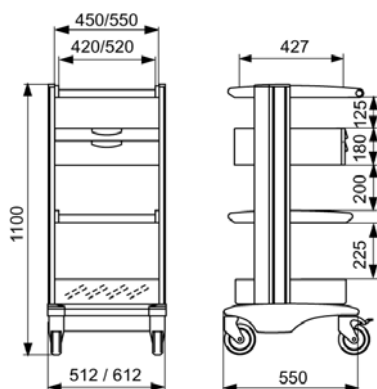

BIL00100

Knürr EliMobil® Labor 5

- Dimensions**
Height, 800 mm
- Supply schedule**
1 Basic frame
1 Worktop with handle
1 Drawer module
Division: 3 OU
1 Worktop
- Material**
Extrusions: aluminium
Worktops: sheet steel/plastic
(for more technical data, see page 24)
- Color combinations**
RAL 7035 light-grey/
RAL 5003 sapphire blue
- Castors**
RAL 9011, graphite black
- How supplied**
Fully assembled

Dimensions

W	H	D	d	w	Order no.	UP
512	800	550	427	450	00.306.448.2	1 unit
612	800	550	427	550	00.306.449.2	1 unit

Knürr EliMobil® Labor 7

- Dimensions**
Height, 1,100 mm
- Supply schedule**
1 Basic frame
1 Worktop with handle
1 Drawer module
Division: 3 OU
1 Worktop
1 Storage tray
- Material**
Extrusions: aluminium
Worktops: sheet steel/plastic
(for more technical data, see page 24)
- Dimensions**
Height, 1100 mm
Overall width, 512 or 612 mm
Useable width, 450 or 550 mm
Depth, 550 mm
- Color combinations**
RAL 7035 light-grey/
RAL 5003 sapphire blue
- Castors**
RAL 9011, graphite black
- How supplied**
Fully assembled

W	H	D	d	w	Order no.	UP
512	1100	550	427	450	00.306.541.2	1 unit
612	1100	550	427	550	00.306.542.2	1 unit



BIL00134

Knürr EliMobil® Basic Rack

Modules can be installed at increments of 25 mm

Maximum static load rating

- Per basic rack: 1,800 N
- Per castor: 750 N

Material

- Extrusions: extruded aluminum
- Rockers: die-cast aluminum
- Crosspiece: sheet steel

Finish

Metal parts: powder-coated texture

Color combinations

- Basic rack: RAL 7035, light gray
- Castors: RAL 9011, graphite black

W	H	D	w	Order no.	UP
512	750	550	450	00.306.621.2	1 unit
512	800	550	450	00.306.631.2	1 unit
512	1100	550	450	00.306.641.2	1 unit
612	750	550	550	00.306.622.2	1 unit
612	800	550	550	00.306.632.2	1 unit
612	1100	550	550	00.306.642.2	1 unit



BIL00130

Knürr EliMobil® Rear Panel

Material

Sheet steel, powder-coated

Color

RAL 7035, light gray, antistatic

W	H	D	w	Order no.	UP
	750	125	450	00.306.850.1	1 unit
	800	125	450	00.306.851.1	1 unit
	1100	125	450	00.306.852.1	1 unit
	750	125	550	00.306.853.1	1 unit
	800	125	550	00.306.854.1	1 unit
	1100	125	550	00.306.855.1	1 unit



BIL00224

Knürr EliMobil® Worktop

Material

Side panels – plastic
Covers – sheet steel, powder-coated
Handle – aluminum, powder-coated

Color

RAL 7035, light gray

W	H	D	w	d	Model	Order no.	UP
		475	450	427	without handle	00.306.761.1	1 unit
		475	450	427	without handle	00.306.762.1	1 unit
		475	450	427	with handle	00.306.751.1	1 unit
		475	450	427	with handle	00.306.752.1	1 unit



BIL00169

Knürr EliMobil® Storage Shelf

Material

Sheet steel, powder-coated

Color

RAL 7035, light gray

W	H	D	w	Model	Order no.	UP
	17	475	450	fixed	00.306.773.1	1 unit
	17	475	550	fixed	00.306.774.1	1 unit
	17	475	450	tilt	00.306.775.1	1 unit
	17	475	550	tilt	00.306.776.1	1 unit



BIL00225

Knürr EliMobil® Storage Tray

Material
Sheet steel, powder-coated

Color
RAL 7035, light gray

W	H	D	w	Order no.	UP
	91	475	450	00.306.781.1	1 unit
	91	475	550	00.306.782.1	1 unit



BIL20010

Knürr EliMobil® Drawer Module

Material
Main unit – laminate, coated
Tray handle – plastic

Color
RAL 7035, light gray
Handle – RAL 5003, sapphire blue

W	Model	Order no.	UP
450	3 OU	00.306.714.2	1 unit
550	3 OU	00.306.715.2	1 unit



BIL00179

Knürr EliMobil® Keyboard Extension Open

With mouse table – moves to the left/right

Material
Sheet steel, powder-coated

Color
RAL 7035, light gray

W	H	D	Order no.	UP
450	55	455	00.306.725.1	1 unit
550	55	455	00.306.730.1	1 unit

** External dimension same as useable surface



BIL00151


Knürr EliMobil® Castor Set

Load capacity
750 N per castor Ø 100 mm

Supply schedule
4 smooth-running castors
2 with snib

Color
RAL 9011, graphite black

ESD	Order no.	UP
	00.306.965.9	1 Stk
•	00.128.980.9	1 Stk

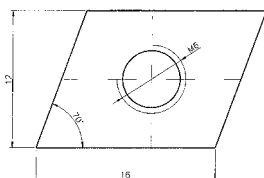

Knürr EliMobil® Sliding Nut, M6

- For mounting components or accessories on the outside of the extrusion

Supply schedule
20 sliding nuts

W	H	D	Order no.	UP
12	4	16	00.306.970.8	1 unit

Knürr DacoMobile® Strong points



MOB00274



MOB20095



MOB20096



MOB20053

Stability

- Total load rating of up to 2100 N
- Worktops each with up to 800 N load rating
- High stability with low-lying centre of gravity
- Torsional strength with stable aluminium extrusions on die-cast aluminium stabilizers and cross-piece of sheet steel
- Optimal stability for equipment set up in the trolley with raised edges all around the worktop

Convenience

- Optimised operation with additional module components, such as
 - Cable duct
 - Rear panel
 - Euro mains distributor
 - Master switch
 - Socket strip
- Ergonomically optimal adjustment with
 - Keyboard extension with side mouse table
 - Pull-out shelves
- Effortless management of obstacles and uneven floors with Ø 125 mm large smooth-running castors
- Positioning with 2 lockable castors
- No marks and scratches on the doors, panels and fittings due to the integrated plastic bumper cap

Variability

- Standard and ESD model components
- Modular designs enable numerous individual models
- Versatile applications ranging from the simple storage trolley to the complex medical trolley
- Simple and quick adjustment without special tools

Dimensions in mm: W= Width
H = Height
D = Depth
h = Installation height
d = Useful depth
L = Length

HU = Standard height unit, 1 HU = 44.45 mm
19"= 482.6 mm, (ideal for 19" components in acc. with DIN 41494)
UP = Unit of packaging
kg = Weight

Conversion: 1 mm = 0.03937 inch
1 kg = 2.2046 pound

Replace „x“ with the number of your color choice

Knürr DacoMobile® system components

Technical data



MOB20051

- Modules can be installed in 50 mm increments in height
- Smooth-running castors, Ø 125 mm, two with stoppers

Material

Basic rack consists of:

- Extrusions: extruded aluminum
- Runners: die-cast aluminum
- Crosspiece: sheet steel

Worktop:

sheet steel

Other modules: combination of sheet steel with laminated particle board, or sheet steel.

Finish

Metal parts: powder-coated texture

Laminated sheet: fine-textured

Color

Extrusions, runners, castors:

RAL 5003, sapphire blue

or RAL 7021 ESD

or RAL 7035, light gray

Modules:

RAL 7035, light gray

ESD castors: black

Maximum static load rating

Per basic rack: 2,100 N


Per castor: 750 N

Surface load per worktop:


up to 800 N

How supplied


Fully assembled

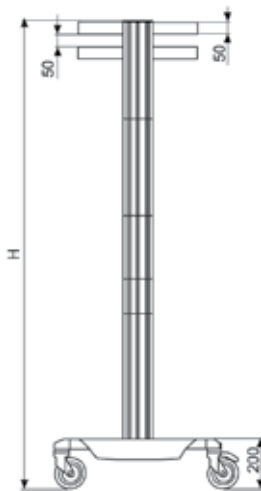

MOB20035

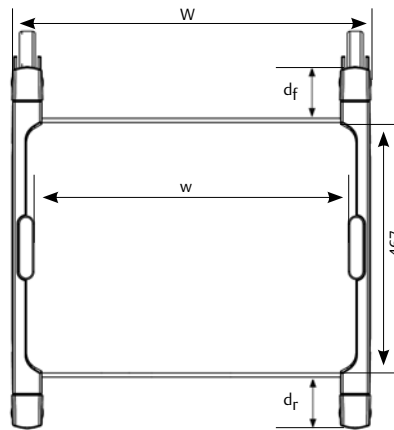

MOB20076

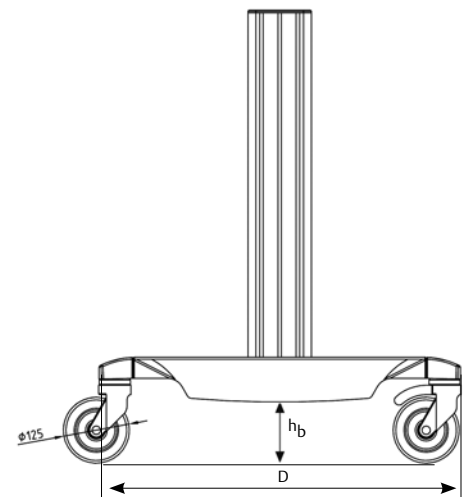

MOB20077

Installation position of the Knürr DacoMobile® elements in 50 mm increments, measured from above.

W (mm)	596	696	
w (mm)	496	596	

D = 680 mm

h_b = 120 mm

d_f = 97 mm

d_r = 97 mm



MOB20097

Knürr DacoMobile® 1515

Material
Worktops – sheet steel
Handle(s) – aluminum extrusion
Base unit crosspiece – sheet steel

Dimensions
Height 1,515 mm

Color
RAL 5003, sapphire blue /
RAL 7035, light gray

Supply schedule
1 basic rack
2 handle
4 worktops

How supplied
Partially assembled

W	H	D	w	Order no.	UP
696	1515	685	596	00.106.628.1	1 unit



MOB20098

Mobile ESD-Measuring and Analysis Station

Color combination
Worktop, RAL 7035, light gray
Extrusions and stabilizer,
RAL 7021 black-gray

Castor – Ø 125 mm

Load rating
Basic rack: 2,100 N
Per castor: 750 N
Surface load per worktop: 800 N


Material / Finish
Basic rack consists of:
- Extrusions: extruded aluminum
- Rockers: die-cast aluminum, powder-coated;

Sliding handle – aluminum extrusion
Base unit crosspiece – sheet steel
Drawer unit, sheet steel
Table top, sheet steel

Supply schedule
1 ESD-basic rack
2 ESD-worktop
1 ESD-drawer
1 ESD-handle

How supplied
Assembled

W	H	D	w	d	Order no.	UP
696	860	685	596	490	00.115.620.9	

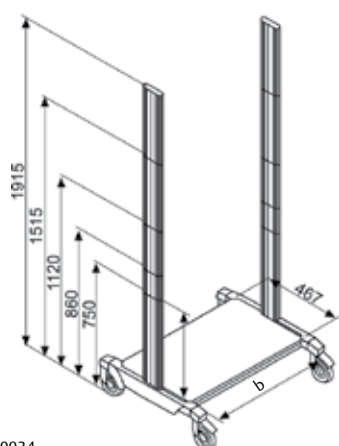

MOB20034



MOB00333

Knürr DacoMobile® Basic Rack

Finish

Replace „x“ with the number of your color choice.
 Final digit of order number .1:
 Vertical extrusions, die-cast aluminium runners RAL 7035 Light gray
 Bottom frame cover RAL 7035 Light gray
 Castors, bumper-caps and end-caps black

Final digit of order number .2:
 Vertical extrusions, die-cast aluminium runners RAL 5003 Sapphire blue
 Bottom frame cover RAL 7035 Light gray
 Castors, bumper-caps and end-caps black
 RAL 5003 Sapphire blue

ESD finish:

Vertical extrusions, die-cast aluminium runners RAL7021 black grey, ESD
 bottom cover
 RAL 7035, light gray, ESD

Conductive castors, impact protection caps and end-caps, black

Supply schedule

1 bottom cover made of sheet steel
 2 die-cast aluminum runners with plastic bumper caps
 4 smooth-running castors – Ø 125 mm, 2 with snib
 2 vertical aluminum extrusions with threaded strips for mounting the modules

Design your own individual equipment carrier as follows:

1. Choose ESD or Standard
2. Select a width
3. Select the height of the basic rack
4. Pick out modules (bear widths in mind)

W	H	w	ESD	Order no.	UP
596	750	496		00.101.505.x	1 unit
696	750	596		00.101.605.x	1 unit
596	750	496	•	00.101.614.9	1 unit
696	750	596	•	00.101.615.9	1 unit
596	860	496		00.102.505.x	1 unit
696	860	596		00.102.605.x	1 unit
596	1120	496		00.103.505.x	1 unit
696	1120	596		00.103.605.x	1 unit
596	1120	496	•	00.103.614.9	1 unit
696	1120	596	•	00.103.615.9	1 unit
596	1515	496		00.104.505.x	1 unit
696	1515	596		00.104.605.x	1 unit
596	1515	496	•	00.104.614.9	1 unit
696	1515	596	•	00.104.615.9	1 unit
596	1915	496		00.105.505.x	1 unit
696	1915	596		00.105.605.x	1 unit
596	1915	496	•	00.105.614.9	1 unit
696	1915	596	•	00.105.615.9	1 unit

Knürr DacoMobile® Cable Duct Large

With convenient hinged cover with two quicklocks
 Separate cable routing via mounting strip
 Cable exit via sealing lips at any height
 Can be mounted left or right

Material

Sheet steel, powder-coated
 RAL 7035, light gray, antistatic
 ESD: RAL 7021, black-gray, antistatic

Supply schedule

1 cable duct
 Mounting material



MOB20057

W	H	D	ESD	Order no.	UP
85	1120	190		00.118.014.1	1 unit
85	1515	190		00.118.015.1	1 unit
85	1915	190		00.118.016.1	1 unit
85	1120	190	•	00.118.214.9	1 unit
85	1515	190	•	00.118.215.9	1 unit
85	1915	190	•	00.118.216.9	1 unit



MOB20067

Knürr DacoMobile® Castor Set

Load capacity: 750 N per castor – ø 125 mm


Color

Standard castors: RAL 5003, sapphire blue
ESD: Black

Supply schedule

4 smooth-running castors
2 with stopper

w	H	D	ESD	Order no.	UP
				00.128.965.2	1 unit
			•	00.128.975.9	1 unit

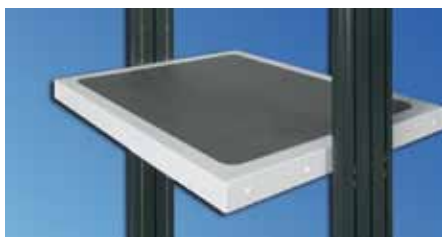

MOB20071

version: sheet steel

Knürr DacoMobile® Worktop

Material

sheet steel, powder-coated

Color

RAL 7035, light gray
ESD version:
RAL 7035, light gray, ESD


Supply schedule

1 worktop
Mounting material

Note

Please order handle and anti-slide mats separately.

H	D	w	Model	ESD	Order no.	UP
50	490	496	Sheet steel		00.101.530.1	1 unit
50	490	596	Sheet steel		00.101.630.1	1 unit
50	490	496	Sheet steel, ESD	•	00.101.540.1	1 unit
50	490	596	Sheet steel, ESD	•	00.101.640.1	1 unit

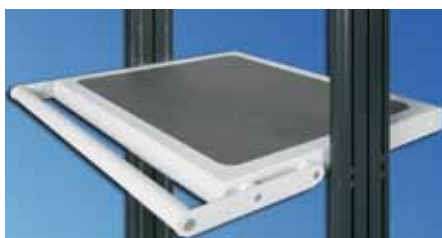

MOB20070

Knürr DacoMobile® Worktop Handle

For sheet steel worktops
Can be mounted from front and/or rear

Material

Sheet steel
Aluminum extrusion handle



Color

RAL 7035, light gray
ESD: RAL 7021, dark gray, antistatic

Supply schedule

1 handle
2 mounting brackets
Mounting material

w	Model	ESD	Order no.	UP
496	Dacomobile worktop handle		00.101.045.1	1 unit
596	Dacomobile worktop handle		00.101.050.1	1 unit
496	Dacomobile worktop handle ESD	•	00.101.145.1	1 unit
596	Dacomobile worktop handle ESD	•	00.101.150.1	1 unit

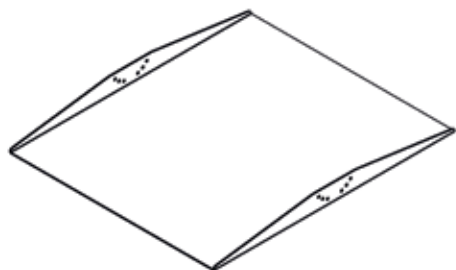

Tiltable Mounting Plate

Universal mounting plate. Can be mounted in three different angle positions.
Maximum static surface load: 20kg.

Material
Sheet-steel, powder-coated

Finish
RAL 7035 Light-gray

Supply schedule
1 mounting plate
Mounting material

W	D	w	Order no.	UP
596	600	496	00.101.134.1	1 unit
696	600	596	00.101.135.1	1 unit
596	700	496	00.101.137.1	1 unit
696	700	596	00.101.138.1	1 unit



MOB20063

Knürr DacoMobile® Cross Extrusion

For cross-bracing the basic rack with heavy components or with high carts.

Material
Sheet steel, powder-coated

Finish
Final digit of order number
.1: RAL 7035 Light-gray

Final digit of order number
.2: RAL 5003 Sapphire blue
Final digit of order number
.9: ESD version, RAL 7021 black-gray ESD

Supply schedule
1 cross extrusion
Mounting material

H	w	Model	ESD	Order no.	UP
	496	Sheet steel		00.122.510.X	1 unit
	596	Sheet steel		00.122.611.X	1 unit
	496	Sheet steel, ESD	•	00.122.510.9	1 unit
	596	Sheet steel, ESD	•	00.122.611.9	1 unit



MOB20050

Knürr DacoMobile® Keyboard Extension Open

ESD or standard version
Extension board with telescopic slides
Mouse table can be moved to the left or right

Material
Sheet steel, powder-coated
Tray handle – plastic

Color
Extension board, mouse table:
RAL 7035, light-grey, antistatic
Standard tray handle, RAL 5003,
sapphire blue
ESD handle, black

Supply schedule
1 keyboard extension, open,
with mouse table
Mounting material

H	D	w	Model	ESD	Order no.	UP
50	490	496	Sheet steel		00.125.525.2	1 unit
50	490	596	Sheet steel		00.125.625.2	1 unit
50	490	496	Sheet steel, ESD	•	00.125.530.1	1 unit
50	490	596	Sheet steel, ESD	•	00.125.630.1	1 unit



MOB20074

Knürr DacoMobile® Keyboard Extension Closed

ESD or standard version
 Closed sheet steel carcass
 Main unit cover recessed for optional anti-slide mats
 Extension board with telescopic slides
 Mouse table can be moved to the left or right with or without lock

Material
 Sheet steel, powder-coated
 Tray handle – plastic

Color
 Main unit, extension board, mouse table:
 RAL 7035, light-grey, antistatic
 Standard tray handle, RAL 5003,
 sapphire blue
 ESD handle, black

Supply schedule
 1 keyboard extension, closed,
 with mouse table
 Mounting material

H	D	w	Model	ESD	Order no.	UP
100	490	496	With lock		00.127.516.2	1 unit
100	490	596	With lock		00.127.616.2	1 unit
100	490	496	With lock	•	00.127.526.1	1 unit
100	490	596	With lock	•	00.127.626.1	1 unit



MOB20072



MOB20073

Knürr DacoMobile® Drawer Module

ESD or standard version
 With or without lock
 Height – 100 or 150 mm
 Sheet steel main unit
 Main unit cover with depression for optional anti-slide mats

Material
 Sheet steel, powder-coated
 Tray handle – plastic

Color
 Main unit, drawer
 RAL 7035, light gray, antistatic
 Tray handle: Standard RAL 5003,
 sapphire blue
 ESD handle: Black

Supply schedule
 1 drawer module
 Mounting material

H	D	w	Model	ESD	Order no.	UP
100	490	496	With lock		00.117.536.2	1 unit
100	490	596	With lock		00.117.616.2	1 unit
100	490	496	With lock	•	00.117.526.1	1 unit
100	490	596	With lock	•	00.117.626.1	1 unit
150	490	496	With lock		00.117.538.2	1 unit
150	490	596	With lock		00.117.618.2	1 unit
150	490	496	With lock	•	00.117.528.1	1 unit
150	490	596	With lock	•	00.117.628.1	1 unit



MOB20068

Knürr DacoMobile® Storage Tray

Tray for paper, cables or small parts
Height 80 mm
With perforation Ø 8 mm

Material
Sheet steel, powder-coated

Color
RAL 7035, light gray, antistatic

Supply schedule
1 storage tray
Mounting material

H	D	w	Model	ESD	Order no.	UP
80	490	496	ESD	•	00.111.512.1	1 unit
80	490	596	ESD	•	00.111.612.1	1 unit



MOB20067

Knürr DacoMobile® Mounting Kit, Fixed For 19" DoubleProRack Enclosures

- Installation option for two different enclosure depths in the basic rack
- Maximum static load rating, 800 N
- Only for Knürr DacoMobile® width 600 mm!
- Only for Knürr DoubleProRack Enclosure Width 600; depth 600 mm and 700 mm

Supply schedule
1 pair of mounting brackets

Note
More information on DoubleProRack:
www.knuerr.com

W	H	D	Order no.	UP
		600	00.101.131.1	1 unit
		700	00.101.132.1	1 unit



MOB20082



MOB20064

ESD mounting set for isolating transformer

Top-Box: Two-piece – bottom panel with cover
Mounting via the base plate of the Knürr DacoMobile®
Tray: Mount on underside of base unit
Secure fixing of the isolating transformers
With ventilation perforations


Material
Sheet steel, powder-coated

Color
RAL 7035, light gray, antistatic

Supply schedule
1 mounting set
Mounting material

Note
Only for Knürr Dacomobile:
W 696 mm, w 596 mm

W	H	D	Model	Order no.	UP
596	140	290	Top-Box	00.101.260.1	1 unit
520	120	350	Tray	00.101.262.1	1 unit

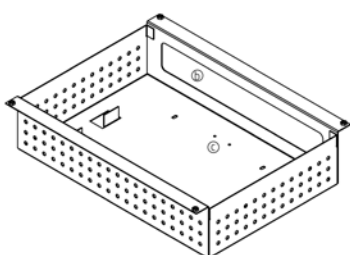



MOB20048

Knürr DacoMobile® Master Switch Module

For mounting on the vertical extrusions
With lit on/off switch, white
Pre-wired with H05VV-F3G cable, 1.5 mm²
Sheet steel, powder-coated

Color

Standard: RAL 7035, light gray, antistatic
ESD: RAL 7021, dark gray

Supply schedule

1 master switch module
Mounting material

W	H	D	ESD	Order no.	UP
40	76	90		00.118.001.1	1 unit



MOB00298

Knürr DacoMobile® Rubber Mat

Material

Self-adhesive rubber-mat made of open
pore sponge rubber

Colour

Standard: gray, ESD: black

W	D	Model	ESD	Order no.	UP
425	420	Standard, for sheet-steel table top and drawer unit top		00.101.195.0	1 unit
525	420	Standard, for sheet-steel table top and drawer unit top		00.101.200.9	1 unit
425	420	Standard, for sheet-steel keyboard extension open		00.105.196.0	1 unit
525	420	Standard, for sheet-steel keyboard extension open		00.101.202.9	1 unit
425	420	ESD, for sheet-steel tabletop and drawer unit top	•	00.101.198.0	1 unit
525	420	ESD, for sheet-steel tabletop and drawer unit top	•	00.101.208.9	1 unit
425	420	ESD, for sheet-steel keyboard extension open	•	00.101.199.0	1 unit
525	420	ESD, for sheet-steel keyboard extension open	•	00.101.210.9	1 unit



MOB00402

Knürr DacoMobile® 19"

Color

RAL 5003, sapphire blue /
RAL 7035 light-grey

How supplied

Part assembled

Supply schedule

1 Basic rack
1 Cross extrusion
2 19" Extrusions
10 Chassis runners

W	H	D	HU/U	h	Order no.	UP
606	1865	685	36	1600,20	01.316.016.2	1 unit
606	2000	685	39	1733,55	01.316.019.2	1 unit



MOB00336

Knürr DacoMobile® Chassis Runner Set For mounting 19" equipment

Material

Sheet steel, zinc passivated

Dimensions

Length: 200 mm
Thickness: 2 mm
Angle bracket: 44 x 50 mm

W	H	D	Order no.	UP
50	44	200	01.316.026.7	1 unit

Dimensions in mm: W= Width
H = Height
D = Depth
h = Installation height
d = Useful depth
L = Length

HU = Standard height
unit, 1 HU = 44.45 mm
19"= 482.6 mm,
(ideal for 19" components
in acc. with DIN 41494)
UP = Unit of packaging
kg = Weight

Conversion: 1 mm = 0.03937 inch
1 kg = 2.2046 pound

Replace „x“ with the number of your
color choice



SYN20005

Knürr SynergyCart® Strong points

The functional solution

- IT cart for hospitals (ward cart)
- Equipment cart for health care
- Test cart in production/workshops
- Storage consignment, scanner cart
- Ideal for automotive and industrial projects where small, space-saving carts with cable management are required
- The unmistakable design is harmonized with the Knürr Synergy® product family
- Fully assembled and turnkey ready for use
- Tested in accordance to the DIN EN 60601_1
- Strong, and yet attractively designed sheet steel basic frame with vertical extruded aluminum supports for the highest possible safety and stability
- ESD versions of all modules available
- Modern, smooth-running double wheel castors in conductive version
- Ergonomics in detail:

All modules can be mounted at any height, absolutely in accordance with the user's individual wishes

- User-friendly cable management with plenty of room for cables, socket strips, isolating transformers, cable exit to the front over the entire height

Material

- Sheet steel/extruded aluminum tube handle
- Cover with master switch optionally
- Aluminum extrusion vertical supports
- Modules can be mounted stepless on the height via T-slots on the aluminum extrusion
- Welded sheet steel base unit
- Spacious cable exit from the supports in the base tray
- Twin swivel castors, Ø125 mm
- Bumper caps



SYN20024



SYN200090



SYN20002

Knürr SynergyCart® Computer Cart

The mobile PC workstation, e.g. for stores, office, lab, training

Material

- Extruded aluminum vertical supports and handle, powder-coated
- Sheet steel basic frame and installation modules, powder-coated
- Plastic bumper caps

Finish

- .1: RAL 7035 light gray
- .9: Base unit, cover for base unit, bumper caps, handle, extrusion cover, worktops, keyboard extension, holder for tower PC: RAL 7021 dark gray
- Vertical extrusion, handle, vertical cable duct, flat screen holder: RAL 9006 white aluminum


Load rating

- Permissible total weight: 125 kg
- Load per worktop: 15 kg
- Drawer load: Housing, 10 kg; extension, 2 kg




Supply schedule

- 1 Knürr SynergyCart® Basic Frame
- 1 vertical cable duct for H 880 mm or H 1,200 mm
- 1 handle
- 1 large worktop (only with height 1,200 mm)
- 1 keyboard extension
- 1 LCD adapter, type D with extrusion adapter
- 1 holder for tower PC
- ESD model with conductive castors and earthing-mounting material

H	ESD	Order no.	UP
880		00.705.300.1	1 unit
880		00.705.300.9	1 unit
880	•	00.705.305.1	1 unit
880	•	00.705.305.9	1 unit
1200		00.705.310.1	1 unit
1200		00.705.310.9	1 unit
1200	•	00.705.315.1	1 unit
1200	•	00.705.315.9	1 unit

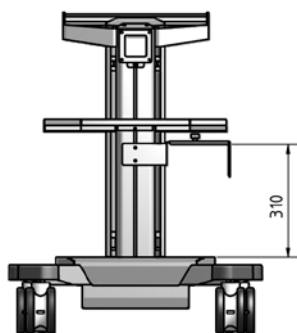

SYN20050

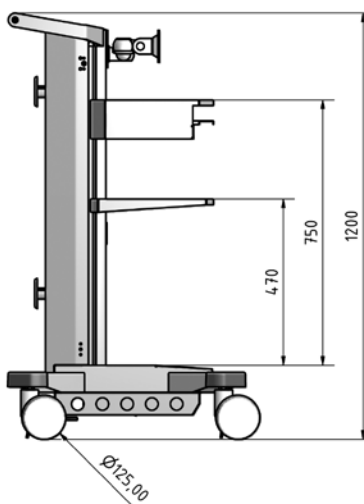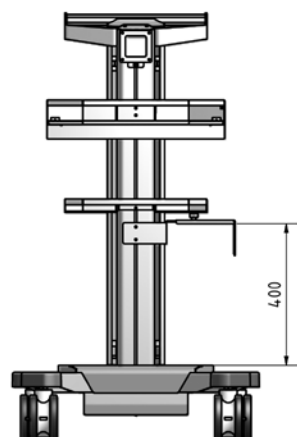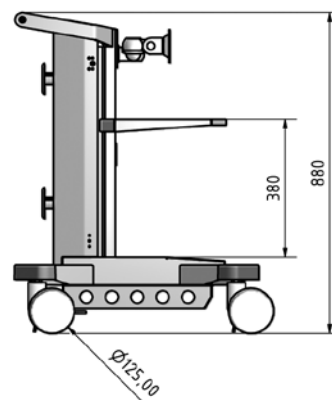

Dimensions in mm: W= Width
H = Height
D = Depth
h = Installation height
d = Useful depth
L = Length

HU = Standard height unit, 1 HU = 44.45 mm
19"= 482.6 mm, (ideal for 19" components in acc. with DIN 41494)
UP = Unit of packaging
kg = Weight

Conversion: 1 mm = 0.03937 inch
1 kg = 2.2046 pound

Replace „x“ with the number of your color choice



SYN20000

Knürr SynergyCart® Laptop Cart

Flexible use in hospitals, offices, test environments, labs

Material

- Extruded aluminum vertical supports and handle, powder-coated
- Sheet steel basic frame and installation modules, powder-coated
- Plastic bumper caps

Finish

- .1: RAL 7035 light gray
- .9: Base unit, cover for base unit, bumper caps, handle, extrusion cover, worktops, drawer: RAL 7021 dark gray
- Vertical extrusion, handle, vertical cable duct: RAL 9006 white aluminum


Load rating

- Permissible total weight: 125 kg
- Load per worktop: 15 kg
- Drawer load: Housing, 10 kg; extension, 2 kg




Supply schedule

- 1 basic frame H 880 mm or 1,200 mm
- 1 cable duct for H 880 mm or H 1,200 mm
- 1 handle
- 1 worktop, small
- 1 worktop, large
- 1 drawer
- ESD model with conductive castors and earthing-mounting material

H	ESD	Order no.	UP
880		00.705.320.1	1 unit
880		00.705.320.9	1 unit
880	•	00.705.325.1	1 unit
880	•	00.705.325.9	1 unit
1200		00.705.330.1	1 unit
1200		00.705.330.9	1 unit
1200	•	00.705.335.1	1 unit
1200	•	00.705.335.9	1 unit

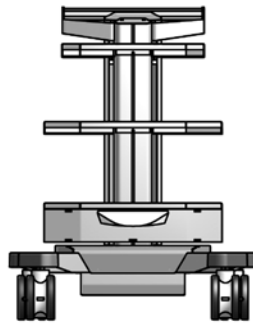

SYN20054

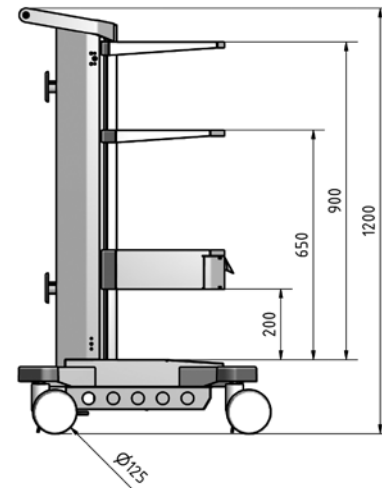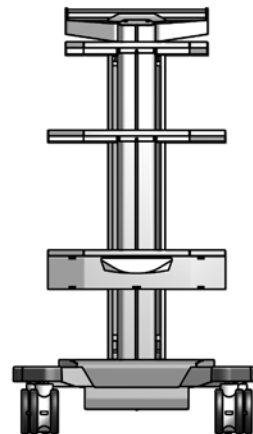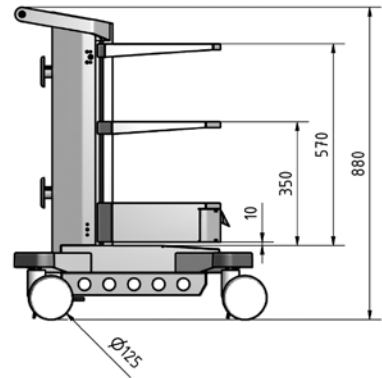

Dimensions in mm: W= Width
H = Height
D = Depth
h = Installation height
d = Useful depth
L = Length

HU = Standard height unit, 1 HU = 44.45 mm
19"= 482.6 mm, (ideal for 19" components in acc. with DIN 41494)
UP = Unit of packaging
kg = Weight

Conversion: 1 mm = 0.03937 inch
1 kg = 2.2046 pound

Replace „x“ with the number of your color choice



SYN20005

Knürr SynergyCart® Equipment Cart

Flexible use in test environments, labs

Material

- Extruded aluminum vertical supports and sliding handle, powder-coated
- Sheet steel basic frame and installation modules, powder-coated
- Plastic bumper caps

Finish

- .1: RAL 7035 light gray
- .9: Base unit, cover for base unit, bumper caps, handle, extrusion cover, worktops, keyboard extension and drawer: RAL 7021 dark gray
- Vertical extrusion, handle, vertical cable duct and transformer tray: RAL 9006 white aluminum


Load rating

- Permissible total weight: 125 kg
- Load per worktop: 15 kg
- Drawer load: Housing, 10 kg; extension, 2 kg
- Keyboard extension load: Housing, 10 kg; extension, 2 kg
- Transformer tray load: 20 kg




Supply schedule


- 1 basic frame H 880 mm or 1,200 mm
- 1 extrusion cover with switch
- 1 handle
- 1 small worktop (only height 1,200 mm)
- 1 worktop, large
- 1 keyboard extension
- 1 drawer
- 1 transformer tray
- ESD model with conductive castors and earthing-mounting material

H	ESD	Order no.	UP
880		00.705.340.1	1 unit
880		00.705.340.9	1 unit
880	•	00.705.345.1	1 unit
880	•	00.705.345.9	1 unit
1200		00.705.350.1	1 unit
1200		00.705.350.9	1 unit
1200	•	00.705.355.1	1 unit
1200	•	00.705.355.9	1 unit

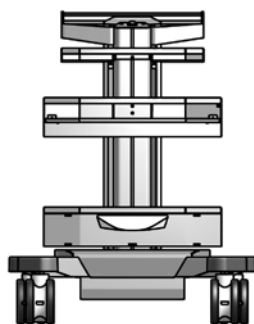


SYN20052

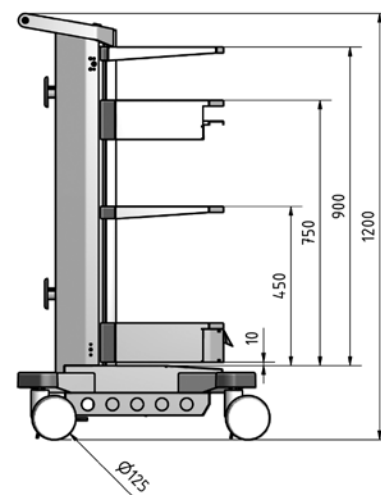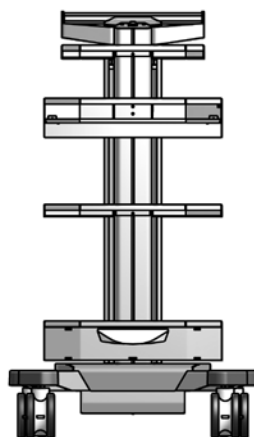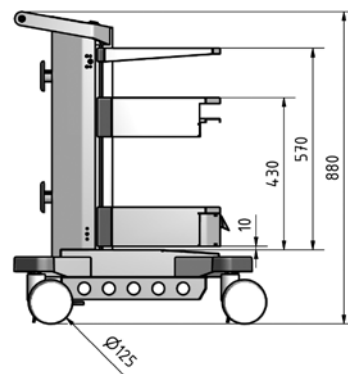


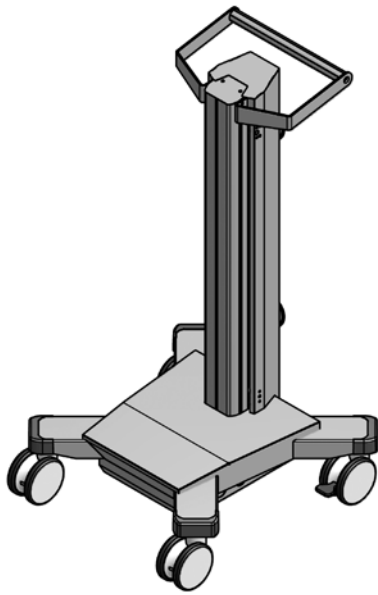

SYN20078

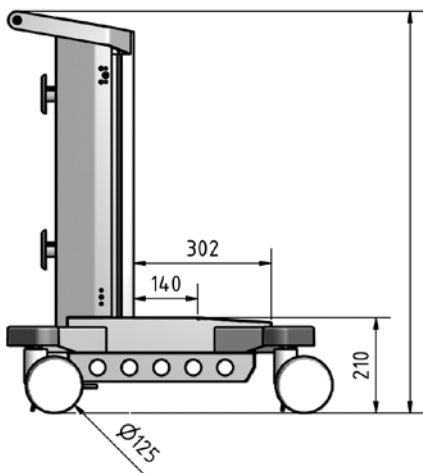

SYN20080

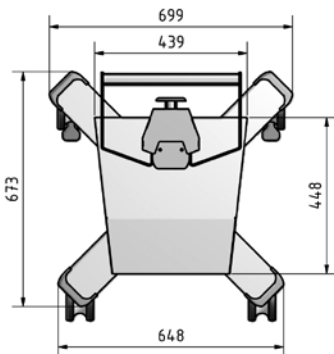

SYN20079

Knürr SynergyCart® Basic Frame

Base unit

- Robust sheet steel welded construction for highest possible stability
- Foot stabilizer position provides optimum stability
- Double wheel castors, 125 mm in modern design
- Bumper caps for protecting furniture
- Base unit cover is also the surface for mini-tower PCs

Aluminum vertical extrusion

- provides flexible screw-on options with T-slots for Knürr DI-STRIP® socket strips and cable routers
- All modules can be mounted at any height with T-slot system on vertical extrusions

Vertical cable duct

- mounted on the rear, plenty of space for cable volumes. Cable exits front and rear over the entire height

Material

- Extruded aluminum vertical supports and sliding handle, powder-coated
- Sheet steel basic frame and cable duct cover, powder-coated
- Plastic bumper caps

Finish

- .1: RAL 7035 light gray
- .9: Base unit, cover for base unit, impact protection caps, handle, extrusion cover: RAL 7021 dark gray
- Vertical extrusion, handle, vertical cable duct: RAL 9006 white aluminum


Load rating

- Permissible total weight: 125 kg
- Base unit cover: 10 kg

Supply schedule

- 1 handle
- 1 extruded aluminum vertical support
- 1 cable duct top cover
- 1 vertical cable duct
- 1 base unit
- Mounting material
- ESD model with conductive castors and earthing material

H	ESD	Order no.	UP
880		00.705.100.1	1 unit
1200		00.705.120.1	1 unit
880		00.705.100.9	1 unit
1200		00.705.120.9	1 unit
880	•	00.705.105.1	1 unit
1200	•	00.705.125.1	1 unit
880	•	00.705.105.9	1 unit
1200	•	00.705.125.9	1 unit

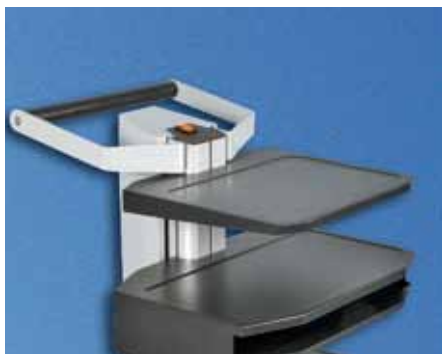

SYN20005



SYN20000

Knürr SynergyCart® Worktop

Can be ergonomically mounted at any height, stepless
Torsion-free and stable
With recessed surface to prevent sliding and for anti-slip mats

Material
Sheet steel, powder-coated

Finish
.1: RAL 7035 light gray
.9: RAL 7021 dark gray

Load rating
15 kg

Supply schedule
1 worktop
Mounting material

W	T	ESD	Order no.	UP
400	300		00.705.200.1	1 unit
400	300		00.705.200.9	1 unit
500	300		00.705.220.1	1 unit
500	300		00.705.220.9	1 unit
400	300	•	00.705.205.1	1 unit
400	300	•	00.705.205.9	1 unit
500	300	•	00.705.225.1	1 unit
500	300	•	00.705.225.9	1 unit

Knürr SynergyCart® Keyboard Extension

Can be ergonomically mounted at any height, stepless
Keyboard extension with mouse table, can be pushed out on the right or left
Stable extension enclosure with telescopic slides
Enclosure cover can be used as storage level
With drawer safety catch against unintentional opening
Also as ESD version

Material
Main unit and extension: Sheet steel, powder-coated

Finish
.1: RAL 7035 light gray
.9: RAL 7021 dark gray

Dimensions
width, 505 mm; depth, 350 mm;
height, 110 mm
drawer width, 490 mm;
depth, 210 mm

Load rating
Housing, 10 kg; extension, 2 kg

Supply schedule
1 keyboard extension
Mounting material

W	H	D	ESD	Order no.	UP
505	110	350		00.705.250.x	1 unit
505	110	350	•	00.705.255.x	1 unit

Dimensions in mm: W= Width
H = Height
D = Depth
h = Installation height
d = Useful depth
L = Length

HU = Standard height unit, 1 HU = 44.45 mm
19" = 482.6 mm,
(ideal for 19" components in acc. with DIN 41494)
UP = Unit of packaging
kg = Weight

Conversion: 1 mm = 0.03937 inch
1 kg = 2.2046 pound

Replace „x“ with the number of your color choice



SYN20006



SYN20001

Knürr SynergyCart® Drawer

Can be ergonomically mounted at any height, stepless
With drawer safety catch against unintentional opening
Also as ESD version

Material
Main unit and drawer: Sheet steel, powder-coated
Handle: Plastic, black

Finish
.1: RAL 7035 light gray
.9: RAL 7021 dark gray

Dimensions
width, 505 mm; depth, 350 mm; height, 110 mm
drawer width, 425 mm; depth, 265 mm; height, 90mm

Load rating
Housing, 10 kg; extension, 2 kg

Supply schedule
1 drawer module
Mounting material

W	H	D	ESD	Order no.	UP
500	300	110		00.705.270.x	1 unit
500	300	110	•	00.705.275.x	1 unit



SYN20024

Knürr SynergyCart® Main Switch Module


Top extrusion cover with central switch
Lit switch, IP 54
Cabled with 3.5 m mains cable with Schuko plug and outgoing 2 m cable with Euro plug, 1.5 mm² cross-section each for device cabling or as connector for Knürr DI-STRIP® socket strip.
Hidden cable routing in the vertical extrusion.

Material
Extrusion cover: Sheet steel, powder-coated

Finish
Extrusion cover:
.1: RAL 7035 light gray
.9: RAL 7021 dark gray

Supply schedule
1 central switch module
Mounting material

Order no.	UP
00.705.280.x	1 unit



SYN20067

Knürr SynergyCart® Cover Extrusion (for cable duct)

For covering the vertical cable exits
As dust protection and hiding from view

Material
Soft rubber/sponge rubber with embedded steel clamp strap

Finish
Black

Dimensions
Lengths – 590 mm and 910 mm

Supply schedule
2 cover extrusions

H	L	Order no.	UP
21	590	for height 880 mm	00.705.297.9
21	910	for height 1200 mm	00.705.298.9



SYN20024

Knürr SynergyCart® Holder for PC Tower Enclosure

Adjustable holder clamp for mini-tower PC
The basic frame's top cover serves as a platform

Material
Sheet steel, powder-coated

Finish
.1: RAL 7035 light gray
.9: RAL 7021 dark gray

Dimensions
Adjustable width, 160 – 220 mm
Height-variable with T-slot mounting

Supply schedule
1 set of holders for PC tower enclosures
Mounting material

W	Order no.	UP
160-220	00.705.236.x	1 unit



SYN20014

Knürr SynergyCart® Holder for infusion stands

Retaining clamps for infusion stands
For 25 mm rod diameter
2 adapters, can be mounted at any height or on any side

Material
Aluminum, powder-coated

Finish
.1: RAL 7035 light gray
.9: RAL 7021 dark gray

Supply schedule
1 set of holders for infusion stands
Mounting material

Order no.	UP
00.705.068.x	1 unit



SYN20015

Knürr SynergyCart® Transformer Tray

For mounting on the underside of the base unit
The low mounting position increases tilt stability with optimum weight distribution
With ventilation openings on the sides and in the base for safe heat dissipation

Material
Sheet steel, powder-coated

Finish
.1: RAL 7035 light gray
.9: RAL 9006 white aluminum

Dimensions
Useful depth, 370 mm
Height, 60 mm, usable height 110mm
Width, 294 mm

Load rating
20 kg

Supply schedule
1 transformer tray
Mounting material

Note
Designed for isolating-transformer, B/N 00.100.842.9 (see page 31)

W	H	D	d	Order no.	UP
294	60	408	370	00.705.230.x	1 unit

Knürr MetraMobil® Strong points



MET00003



MET 20000



MET00034



MET00037

■ Variability

- A completely individual cart can be configured from a basic frame in 2 heights, 3 colors and 5 module components.
- Ideal height adjustment with variable height setting of the shelves

■ Stability

- High load rating:
up to 600 N per worktop
up to 2200 N for full trolley
- High stability with advanced sheet steel construction

■ Functionality

- Suitable for the most varied areas of application: PC or printer station, IT-cart, logistics or laboratory

■ Cable management

- Safe cable routing with two cable ducts integrated in the extrusion
- Clear and orderly cable management with integration of accessory parts, e.g. a socket strip, which can be mounted on the extrusion.

■ ESD versions

- Safety and protection in demanding ESD environments provided by ESD castors and ESD powder coating.



MET00018



MET00014



MET20008

Knürr MetraMobil® Basic Configurations

Replace „x“ with the number of your color choice.

- **Final digit of order number .1:**
Worktops, RAL 7035, light-grey
Extrusions, RAL 9006, white aluminium
Handle, RAL 9011, graphite black
- **Final digit of order number .2:**
Worktops, NCS 3060 R80B, blue
Extrusions, RAL 9006, white aluminium
Handle, RAL 9011, graphite black
- **Final digit of order number .9:**
Worktops, RAL 7016, anthracite grey
Extrusions, RAL 9006, white aluminium
Handle, RAL 9011, graphite black

- **ESD versions:**
Note: ESD only in color variant .1 (light gray)
Final digit of order number .1:
Worktops, RAL 7035, antistatic light gray
Extrusions, RAL 9006, white aluminium
Handle: RAL 7021, dark gray, antistatic

- Design your individual trolley as follows:
1. Select height of the basic trolley
2. Select ESD or standard model
3. Pick out additional modules

- The basic model can be easily expanded with system components (bear ESD in mind!)

- Worktops: variable height adjustable

- **Dimensions**
Height, 900 mm or 1120 mm
Full width, 550 mm
Useful width, 500 mm
Depth, 580 mm
Useful depth, 440 mm
Castor Ø 125 mm

- **Load rating**
Basic rack: 2200 N
Per castor: 750 N
Surface load per worktop: 600 N

- **Material/Finish**
Basic rack consists of:
- Extrusions: extruded aluminium, powder-coated
- Worktops: sheet steel, powder-coat textured
Handle: aluminium tube, powder-coat textured

- **Supply schedule**
1 Basic rack
1 Worktop with handle
1 Worktop at height 900 mm
2 Worktops at height 1120 mm

Supply schedule Metramobil Light

- 1 Basic rack
1 Worktop with handle

- **How supplied**
Pre-assembled modules

W	H	D	w	d	ESD	Model	Order no.	UP
550	900	580	500	440			00.709.000.x	1 unit
550	900	580	500	440	•		00.709.100.1	1 unit
550	900	580	500	440		Metramobil light	00.709.200.x	1 unit
550	1120	580	500	440			00.711.000.x	1 unit
550	1120	580	500	440	•		00.711.100.1	1 unit
550	1120	580	500	440		Metramobil light	00.711.200.x	1 unit

Dimensions in mm: W= Width
H = Height
D = Depth
h = Installation height
d = Useful depth
L = Length

HU = Standard height unit, 1 HU = 44.45 mm
19"= 482.6 mm, (ideal for 19" components in acc. with DIN 41494)
UP = Unit of packaging
kg = Weight

Conversion: 1 mm = 0.03937 inch
1 kg = 2.2046 pound

Replace „x“ with the number of your color choice



MET00058

Knürr MetraMobil® 900

Replace „x“ with the number of your color choice.

- **Final digit of order number .1:**
Worktops, RAL 7035, light-grey
Extrusions, RAL 9006, white aluminium
Handle, RAL 9011, graphite black
- **Final digit of order number .2:**
Worktops, NCS 3060 R80B, blue
Extrusions, RAL 9006, white aluminium
Handle, RAL 9011, graphite black
- **Final digit of order number .9:**
Worktops, RAL 7016, anthracite grey
Extrusions, RAL 9006, white aluminium
Handle, RAL 9011, graphite black

- Worktops: variable height adjustable

- Castor: Ø 125 mm

- **Load rating**
Basic rack: 2200 N
Per castor: 750 N
Surface load per worktop: 600 N

- **Material/Finish**
Basic rack consists of:
- Extrusions: extruded aluminium, powder-coated
- Worktops: sheet steel, powder-coat textured
Handle: aluminium tube, powder-coat textured

- **Supply schedule**
1 Basic rack
1 Worktop with handle
1 Worktop
1 Keyboard extension with mouse table

- **How supplied**
Pre-assembled modules

W	H	D	w	d	Order no.	UP
550	900	580	500	440	00.709.002.x	



MET00060

Knürr MetraMobil® 1120

Replace „x“ with the number of your color choice.

- **Final digit of order number .1:**
Worktops, RAL 7035, light-grey
Extrusions, RAL 9006, white aluminium
Handle, RAL 9011, graphite black
- **Final digit of order number .2:**
Worktops, NCS 3060 R80B, blue
Extrusions, RAL 9006, white aluminium
Handle, RAL 9011, graphite black
- **Final digit of order number .9:**
Worktops, RAL 7016, anthracite grey
Extrusions, RAL 9006, white aluminium
Handle, RAL 9011, graphite black

- Worktops: variable height adjustable

- Castor: Ø 125 mm

- **Load rating**
Basic rack: 2200 N
Per castor: 750 N
Surface load per worktop: 600 N

- **Material/Finish**
Basic rack consists of:
- Extrusions: extruded aluminium, powder-coated
- Worktops: sheet steel, powder-coat textured
Handle: aluminium tube, powder-coat textured

- **Supply schedule**
1 Basic rack
1 Worktop with handle
2 Worktops
1 Keyboard extension with mouse table

- **How supplied**
Pre-assembled modules

W	H	D	w	d	Order no.	UP
550	1120	580	500	440	00.711.002.x	



MET00014

Knürr MetraMobil® Worktop

Replace „x“ with the number of your color choice.

Standard versions:

Final digit of order number .1:

RAL 7035 light-grey

Final digit of order number .2:

NCS 3060 R80B, blue

Final digit of order number .9:

RAL 7016 anthracite grey

ESD version:

Note: ESD only in color variant .1 (light-grey)

Final digit of order number .1:

RAL 7035 anti-static, light-grey

For storage and work purposes

Variable setting between the vertical extrusions

ESD model in accordance with EN 100015

Supply schedule

1 Worktop
Mounting material

How supplied

Flat-packed kit

W	H	D	ESD	Model	Order no.	UP
500	25	440			00.701.020.x	1 unit
500	25	440	•		00.701.120.1	1 unit
500	25	440		with handle	00.701.021.x	1 unit
500	25	440	•	with handle	00.701.121.1	1 unit



MET00040

Knürr MetraMobil® Anti-Slide Mat Set

Note:

Anti-slide mats are not possible at the same time with keyboard extension!

Consists of 4 anti-slide mats

For slide-proof storage of parts to be transported

As scratch protection for the worktop

Material

Industrial rubber, self-adhesive

Color

Black

Supply schedule

4 Anti-slide mats

How supplied

Flat-packed kit

ESD model

Consisting of four anti-slide mats, ESD, self-adhesive

Tests

ESD test in accordance with EN 100015

Material

Industrial rubber, antistatic

Color

Black

W	H	D	ESD	Order no.	UP
475		430		00.701.070.9	1 unit
475		430	•	00.701.170.9	1 unit



MET00035

Knürr MetraMobil® Keyboard Extension

Replace „x“ with the number of your color choice.

Standard versions:

Final digit of order number .1:

RAL 7035 light-grey

Final digit of order number .2:

NCS 3060 R80B, blue

Final digit of order number .9:

RAL 7016 anthracite grey

ESD version:

Note: ESD only in color variant .1 (light-grey)

Final digit of order number .1:

RAL 7035 anti-static, light-grey

For mounting on Knürr MetraMobil® worktop and worktop with handle

With side mouse table, left/right

Extension 200 mm

ESD model in accordance with EN 100015

Supply schedule

1 Keyboard extension
Mounting material

How supplied

Flat-packed kit

Note

With worktop with keyboard extension, an anti-slide mat is not possible!

W	H	D	ESD	Order no.	UP
505	45	200		00.701.060.x	1 unit
505	45	200	•	00.701.160.1	1 unit



MET00017

Knürr MetraMobil® Drawer Module

Replace „x“ with the number of your color choice.

Standard versions:

Final digit of order number .1:

RAL 7035 light-grey

Final digit of order number .2:

NCS 3060 R80B, blue

Final digit of order number .9:

RAL 7016 anthracite grey

ESD version:

Note: ESD only in color variant .1 (light-grey)

Final digit of order number .1:

RAL 7035 anti-static, light-grey

For holding small material

Including divider set

Material/Finish

Sheet steel, powder-coat textured

ESD model in accordance with EN 100015

Supply schedule

1 Drawer module
Mounting material

How supplied

Flat-packed kit

W	H	D	ESD	Order no.	UP
500	165	440		00.701.001.x	1 unit
500	165	440	•	00.701.101.1	1 unit



MET00033

Knürr MetraMobil® Rear Panel

Replace „x“ with the number of your color choice.

Standard versions:

Final digit of order number .1:

RAL 7035 light-grey

Final digit of order number .2:

NCS 3060 R80B, blue

Final digit of order number .9:

RAL 7016 anthracite grey

ESD version:

Note: ESD only in color variant .1 (light-grey)

Final digit of order number .1:

RAL 7035 anti-static, light-grey

■ With cable entry

■ ESD model in accordance with EN 100015

Material/Finish

Sheet steel, powder-coat textured

Supply schedule

1 Rear panel

Mounting material

How supplied

Flat-packed kit

W	H	D	ESD	Order no.	UP
380	900			00.701.010.x	1 unit
380	1120			00.701.011.x	1 unit
380	900		•	00.701.110.1	1 unit
380	1120		•	00.701.111.1	1 unit



MET00037

Knürr MetraMobil® Cable Management Set

■ Consists of:

- Di-Strip socket strip, 4-way, without switch
- Strain relief
- Two cable reel elements

Supply schedule

1 Cable management set

Mounting material

How supplied

Flat-packed kit

Order no.	UP
00.701.050.1	1 unit



MET00021

Knürr MetraMobil® Castor Set

■ Load rating, 750 N per castor, Ø 125 mm

Color

RAL 9011, graphite black

Supply schedule

4 smooth-running castors,

2 with brake


ESD	Order no.	UP
	00.701.965.9	1 unit
•	00.128.975.9	1 unit

Dimensions in mm: W= Width
H = Height
D = Depth
h = Installation height
d = Useful depth
L = Length

HU = Standard height unit, 1 HU = 44.45 mm
19"= 482.6 mm, (ideal for 19" components in acc. with DIN 41494)
UP = Unit of packaging
kg = Weight

Conversion: 1 mm = 0.03937 inch
1 kg = 2.2046 pound

Replace „x“ with the number of your color choice

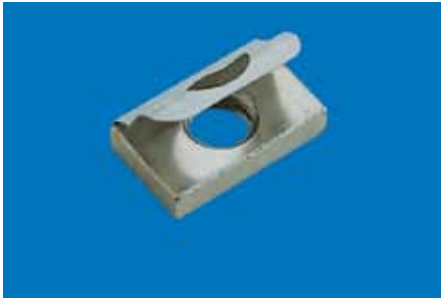

MEC00060

Spring nuts M5 and M6

- For clipping into T-slots at any position
- For mounting chassis rails and other components

Material
Steel, St 1203
Spring band, Nirosta 4310

Supply schedule
50 spring nuts

W	H	D	Model	Order no.	UP
			M5	01.350.405.9	1 unit
			M6	01.350.431.9	1 unit



MOB20013

Universal Arm

- 3-joint with manual clamp
- With cable/hose holder

Supply schedule
1 universal arm incl. adapter

W	H	D	Order no.	UP
			00.306.950.1	1 unit



MOB20083

Antistatic Castor Set

Load capacity – 90 kg

Color
RAL 9011, graphite black

Supply schedule
4 smooth-running castors
2 with brake

Type	Color	Diameter	Order no.	UP
ESD	Black	125	00.128.975.9	1 unit

Dimensions in mm: W= Width
H = Height
D = Depth
h = Installation height
d = Useful depth
L = Length

HU = Standard height
unit, 1 HU = 44.45 mm
19"= 482.6 mm,
(ideal for 19" components
in acc. with DIN 41494)
UP = Unit of packaging
kg = Weight

Conversion:

1 mm = 0.03937 inch
1 kg = 2.2046 pound

Replace „x“ with the number of your
color choice



MOB00331

Cable routing set Mounting on the vertical extrusions

Material
Plastic

Color
RAL 7035, light gray

Supply schedule
1 cable routing set
Mounting material

W	H	D	Order no.	UP
	500		00.101.001.9	1 unit



MOB00338

Cable Winder For up to 5 m of cable

Material
Plastic

Color
RAL 7035 light-grey

Supply schedule
2 Cable winders
Mounting material

W	H	D	Order no.	UP
			00.306.957.1	1 unit



MOB20099

Isolating Transformers

NTC: For switch-on peak limit are NTCs in the input power circuit before the transformer.

ALE: The switch-on peak limit is set via an electrical relay in the input power circuit, which ensures "soft switching-on".

Basis of EC Declaration of Conformity in acc. with Directive 93/42 EEC, Annex I:
EN60601-1, EN60601-1-1
EN60601-1-1-2 (EMC)
EN14971

Supply schedule
1 isolating transformer
1 mains cable, 2.5 m
with protective contact plug

How supplied
Flat-packed kit

Note
Additional versions available on request

W	H	D	Switch-on current limiter	Type	Power (W)	Order no.	UP
286	110	312	NTC	IMed 2000E	2000	00.100.842.9	1 unit

Dimensions in mm: W = Width
H = Height
D = Depth
h = Installation height
d = Useful depth
L = Length

HU = Standard height
unit, 1 HU = 44.45 mm
19" = 482.6 mm,
(ideal for 19" components
in acc. with DIN 41494)
UP = Unit of packaging
kg = Weight

Conversion: 1 mm = 0.03937 inch
1 kg = 2.2046 pound
Replace „x“ with the number of your
color choice



MOB20100

Leakage Detector Set

- Monitoring and alert unit for secondary isolation resistance.
- For use in combination with isolating transformers IMed series.

Technical data
230 VAC, IP 40

L	W	H	Order no.	UP
192	32	56	00.100.841.9	1 unit



MOB00042

Gas Bottle Holder

Bottle holder for 5 L or 10 L bottles up to max. Ø 150 mm

Finish
RAL 7035 light-grey

Supply schedule
1 Bottle holder
1 Retaining belt
Mounting material

W	H	D	Order no.	UP
			00.100.075.1	1 unit



MOB00232

Standard Rail

Length, 460 mm

Material
High-grade steel 25x10 mm

Supply schedule
1 Standard rail
Mounting material

W	H	D	Model	Order no.	UP
460	25	10	Knürr DacoMobile®	00.128.016.1	1 unit
460	25	10	Knürr EliMobil®	00.306.940.1	1 unit



MOB20053

Side Shelf

For Knürr DacoMobile® and Knürr EliMobil®

Material
Laminated 3-layer particle board
Folding brackets: sheet steel
Finish: RAL 7035 light grey

Delivery Schedule
1 side shelf
1 set of folding brackets
Mounting hardware

W	D	Order no.	UP
300	400	00.101.250.1	1 unit

Dimensions in mm: W = Width
H = Height
D = Depth
h = Installation height
d = Useful depth
L = Length

HU = Standard height unit, 1 HU = 44.45 mm
19" = 482.6 mm, (ideal for 19" components in acc. with DIN 41494)
UP = Unit of packaging
kg = Weight

Conversion: 1 mm = 0.03937 inch
1 kg = 2.2046 pound

Replace „x“ with the number of your color choice



MOB00339

IV-Pole

- Can only be used in combination with standard rails, BN 00.128.016.1 or B/N 00.705.068.x SynergyCart® holder for infusion stands
- 4 Hooks
- Chrome-plated
- Height adjustable
- Width, approx. 110 cm

Load rating
2 kg per hook

Supply schedule
1 Serum holder including mounting (without standard rails)

W	H	D	Order no.	UP
			00.306.955.0	1 unit



MOB00337

Hook-On Block For holding test pins

Note
Only for Knürr DacoMobile® and Knürr EliMobil®

Material
Plastic

Color
RAL 9011, graphite black

Supply schedule
1 hook-on block
Mounting material

W	H	D	Order no.	UP
			00.701.090.9	1 unit



MOB20061

Multi-Functional Extrusions for Flat Screen Supports

- For mounting between the Knürr Mobile vertical extrusions
- Sturdy and stable Knürr TFT Adapter connection

Note
TFT adapters are not included in the supply schedule, please order separately

Material
- Extruded aluminum extrusions
- Sheet steel mounting plates

Finish
Metal parts – powder-coated, RAL 9006, white aluminum

How supplied
Flat-packed kit

Supply schedule
2 Funktional rails
Mounting material

W	Model	Order no.	UP
596	Knürr DacoMobile®	00.101.008.9	1 unit
763	Knürr DacoMobile®	00.101.009.9	1 unit
500	Knürr MetraMobil®	00.701.055.9	1 unit

WE PUT SPACE TO WORK. WORLDWIDE

Emerson is based in St. Louis, Missouri (USA), and as a leading technology and development specialist provides globally innovative customer solutions to industry, business and consumer markets in the areas of network power supply, process management, industrial automation and thermal management, as well as the corresponding equipment and tools.

The Knürr Technical Furniture manufactures and develops workstations for electronics labs and mobile equipment carriers for healthcare and automotive industries. Furthermore Knürr is the specialist for height adjustable control room workstations.

www.emerson.com
www.technical-furniture.com

Knürr Technical Furniture GmbH

Mariakirchener Straße 38
 94424 Arnstorf • Germany
T +49 8723 28 0
F +49 8723 28 138
furniture@knuerr.com

While every precaution has been taken to ensure accuracy and completeness in this literature, InterMetro Industries Corporation assumes no responsibility and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

The Emerson Logo is a trademark and a service mark of Emerson Electric Company.
 ©2012 Emerson Electric Co.



EMERSON. CONSIDER IT SOLVED.™