
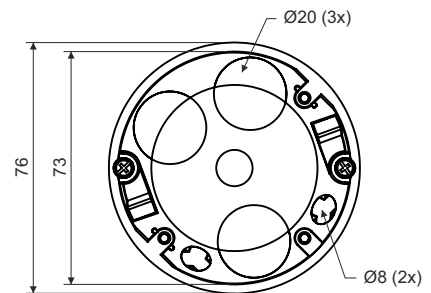


KU 68 LD/1HF



product description:

designed for distribution system with voltage 400 V and with maximum current 16 A
 for premises with increased need for protection of persons and property
 inlet openings made of flexible material
 air-tightness even with inserted cable or pipe
 suitable for low energy and passive houses
 prevents airflow through the installation
 mounting screws are fitted with a triple thread for quick installation
 when mounting, it is not necessary to countersink the plasterboard edge
 allows to install double-socket
 after adjusting the edge possibly fitting multiple frames (spacing 71 mm)
 possibility to insert a terminal plate and screwless terminals
 when using box with the cover V 68HF, the IP protection is IP30

material: PP (halogen-free, Pb Free)

color: white

self-snuffing: yes, within 30 s

temperature resistance: -5 - +60 °C

flaming loop test: 850 °C

fire class for underlying material: A1-F

weight: 26 g

certification: EN 60 670-1

storage: ČSN 64 0090

configuration: HA - boxes fitted with screws for mounting into double wall and device screws; 90 boxes loose in cardboard

accessories: cover V 68HF
 terminal plate S-66
 screwless terminal plates TYP015, TYP016, TYP017, TYP018

auxiliary tools: drill for hollow walls - set VDS 68 (universal carrier VPTU + saw-drill VPT 68 + spring P1)